

**PRODUCT ID: 67887**  
**DOT LED Blank-Out Sign**

**MODEL**  
 DOT2424RAG-B295DS/100-240VAC



**DIMENSIONS**  
 24" H x 24" W x 6.5" D (est. 48.04 lbs)

**CLASS**  
 Class: DOT Series  
 Control Method: Switch (not included) or external relay.

**CONSTRUCTION**  
 Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.  
 Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.  
 Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)  
 Faces: Single Faced Sign  
 Finish: Powdercoat Black

**ELECTRICAL**  
 Input Voltage: 100-240 VAC  
 Photodimming: IR photocells for auto photodimming  
 Power Supplies: No Redundancy  
 UL/cUL Listed: Listed for wet locations

**MESSAGE**  
 Illumination: Super bright direct view LEDs. Message blanks out when off.  
 Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	15.0"	0.058-0.024
X	Amber Narrow Angle LED	15.0"	0.058-0.024
Down Arrow	Green Narrow Angle LED	16.25"	0.090-0.037


NOTE: Above messages are independently controlled.

**Signal-Tech**  
 4985 Pittsburgh Ave.  
 Erie, PA 16509  
 Phone: (877) 547-9900  
 Fax: (814) 835-2300  
 Email: sales@signal-tech.com  
 Website: www.signal-tech.com




**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

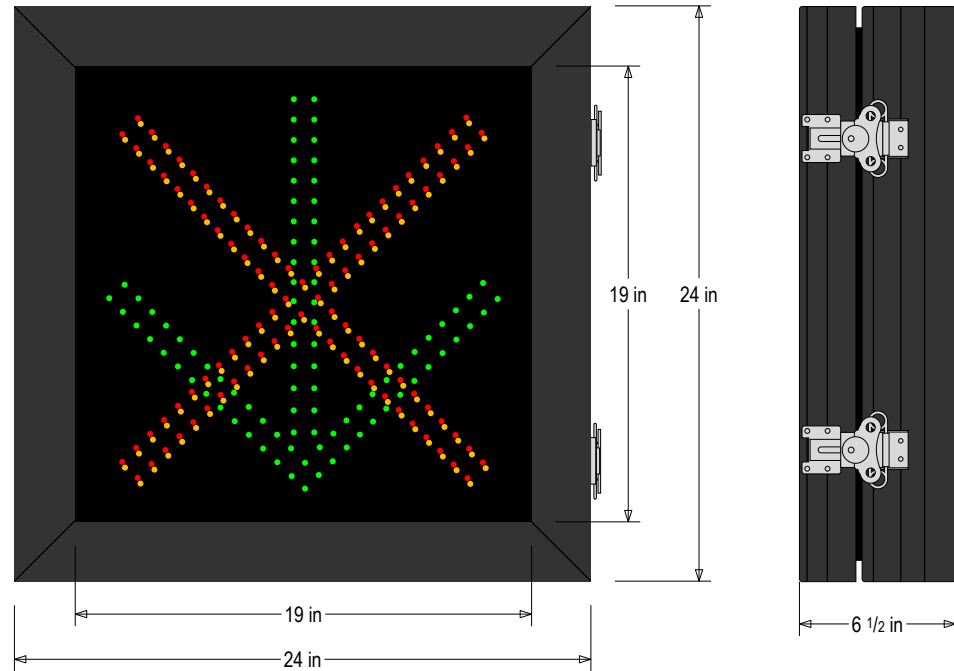

**Sample Display Options**

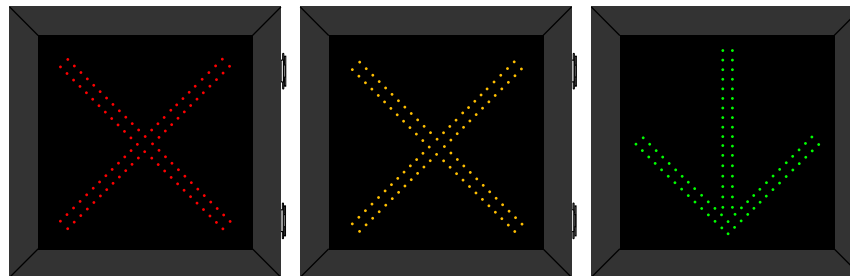

**Frame Detail**

