

## PRODUCT ID: 68468

### DOT LED Blank-Out Sign

#### MODEL

DOT3529W-S767/100-240VAC

#### DIMENSIONS

35" H x 29" W x 6.5" D (est. 64.595 lbs)

#### CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.

Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.

Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

#### ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: IR photocells for auto photodimming

Power Supplies: No Redundancy

UL/cUL Listed: Listed for wet locations

#### MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below



| MESSAGE                         | LED/COLOR              | HEIGHT  | AMPS        |
|---------------------------------|------------------------|---------|-------------|
| Up Arrow w/ Right Veering Arrow | White Narrow Angle LED | 23.625" | 0.126-0.053 |

NOTE: Above messages are independently controlled.

#### Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300


Email: sales@signal-tech.com

Website: www.signal-tech.com



## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

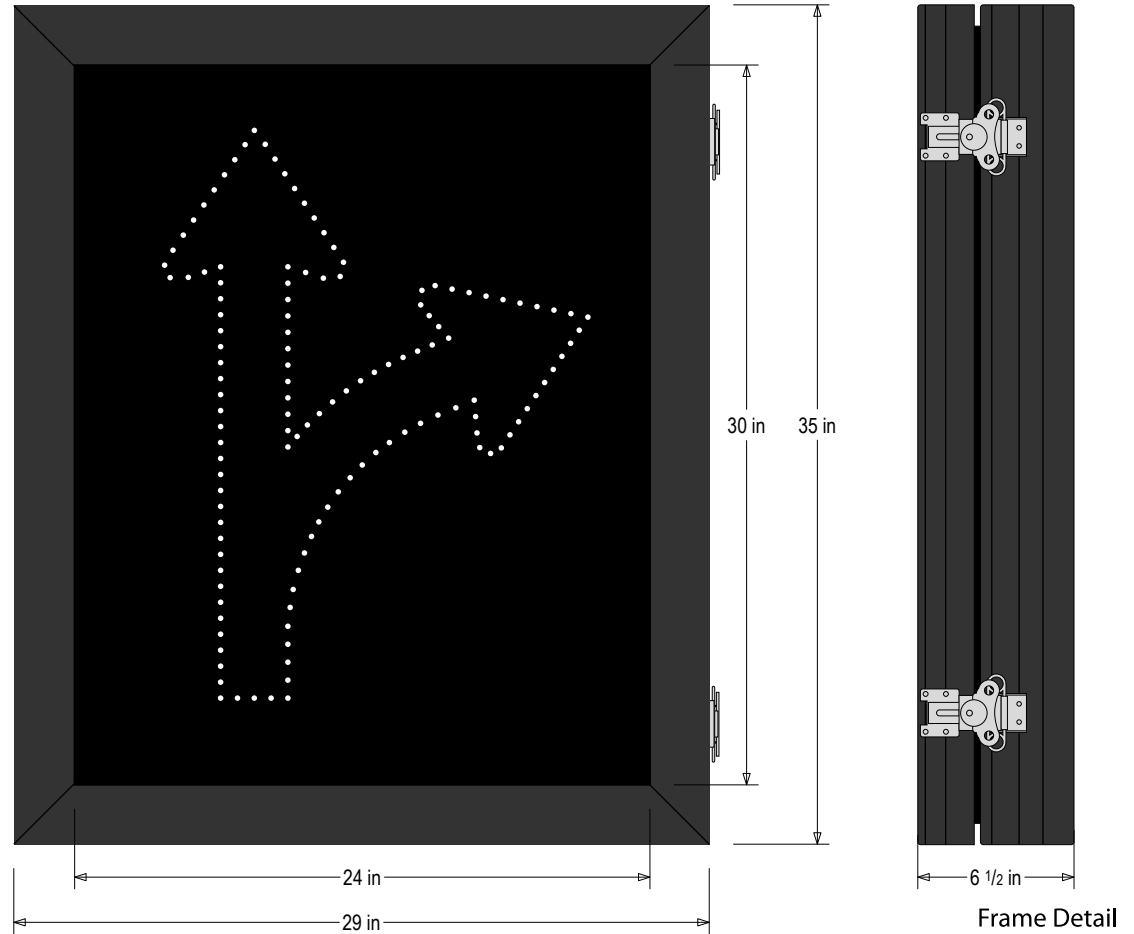

Frame Detail

