

PRODUCT ID: 67819

DOT LED Blank-Out Sign

MODEL

DOT2066GR-100DS/100-240VAC



DIMENSIONS

20" H x 66" W x 6.5" D (est. 93.081 lbs)

CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.

Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.

Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: IR photocells for auto photodimming

Power Supplies: Redundant

UL/cUL Listed: Listed for wet locations


MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.



Sign Messages: See message table below

Product View


NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

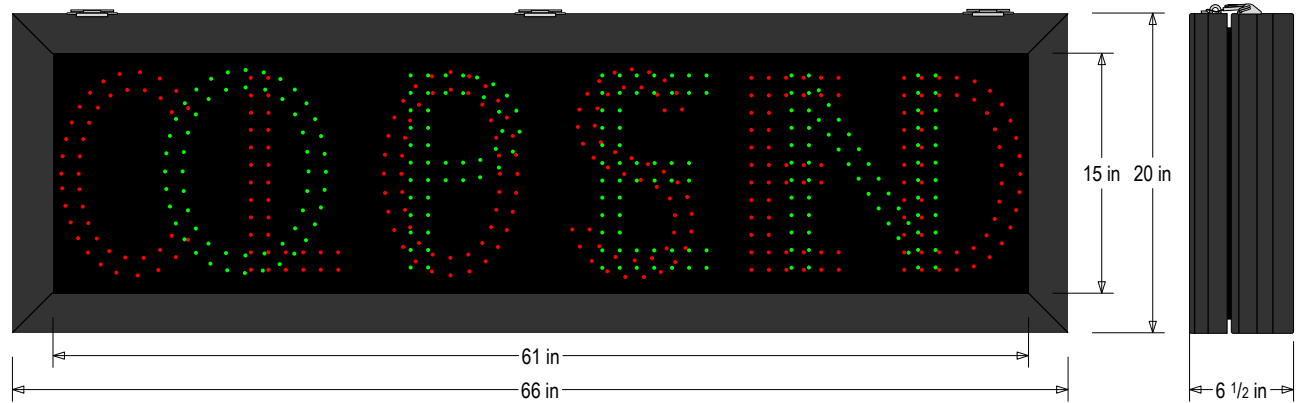

Sample Display Options

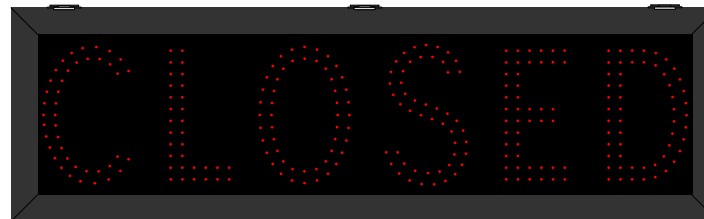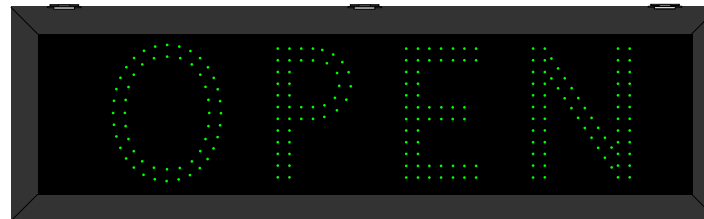

Frame Detail



MESSAGE	LED/COLOR	HEIGHT	AMPS
OPEN	Green Narrow Angle LED	12.0"	0.213-0.089
CLOSED	Red Narrow Angle LED	12.0"	0.162-0.067

NOTE: Above messages are independently controlled.

Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300

Email: sales@signal-tech.com

Website: www.signal-tech.com

