

## PRODUCT ID: 51897

### Outdoor Blank-out LED Backlit Sign

#### MODEL

PHX1434GGR-256/12-24VDC



#### DIMENSIONS

14" H x 34" W x 2.5" D (est. 13.67 lbs)

#### CLASS

Class: PHX Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.

Face Material: 1/8" thick, dark grey diffused acrylic

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

Mounting Channel: None

#### ELECTRICAL

Flashing: Not Included

Input Voltage: 12-24 VDC

UL/cUL Listed: Listed for wet locations

#### MESSAGE

Color: Black opaque

Font: Swiss 721 Bold BT

Illumination: Backlit with high intensity LEDs. Message blanks out when off

Sign Messages: See message table below

## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.



MESSAGE	LED/COLOR	HEIGHT	AMPS
COMMERCIAL	Green Wide Angle LED	3.5"	3.467-1.733
OPEN	Green Wide Angle LED	3.75"	1.733-0.867
CLOSED	Red Wide Angle LED	3.75"	1.160-0.580

NOTE: Above messages are independently controlled.

#### Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900


Fax: (814) 835-2300

Email: sales@signal-tech.com

Website: www.signal-tech.com



#### Sample Display Options

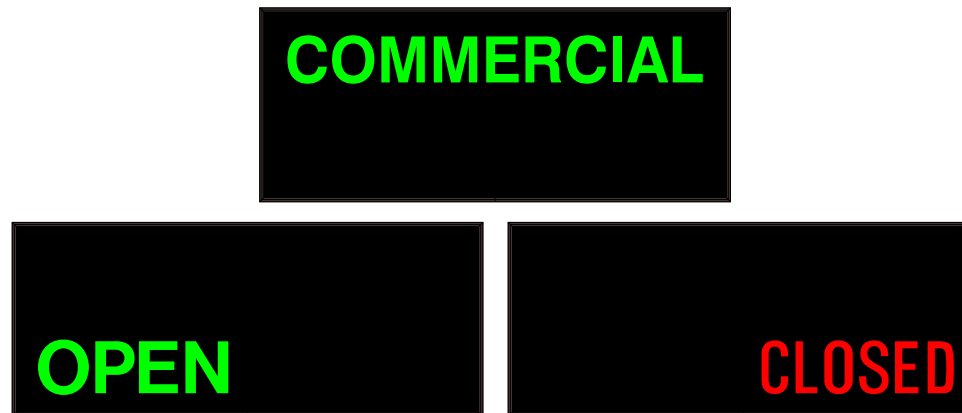

#### Frame Detail

