

PRODUCT ID: 67777

DOT LED Blank-Out Sign

MODEL

DOT4141RWAWR-S599/100-240VAC



DIMENSIONS

41" H x 41" W x 6.5" D (est. 100.654 lbs)

CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.

Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.

Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: IR photocells for auto photodimming

Power Supplies: No Redundancy

UL/cUL Listed: Listed for wet locations

MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
No Right Turn Symbol	Red, White Narrow Angle LED	31.0", 19.0"	0.294-0.123
TURNING VEHICLES Right Turn Arrow YIELD to Pedestrian Symbol	Amber, White, Red Narrow Angle LED	30.7", 17.1", 4.2", 17"	0.498-0.207

NOTE: Above messages are independently controlled.

Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300


Email: sales@signal-tech.com

Website: www.signal-tech.com




Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

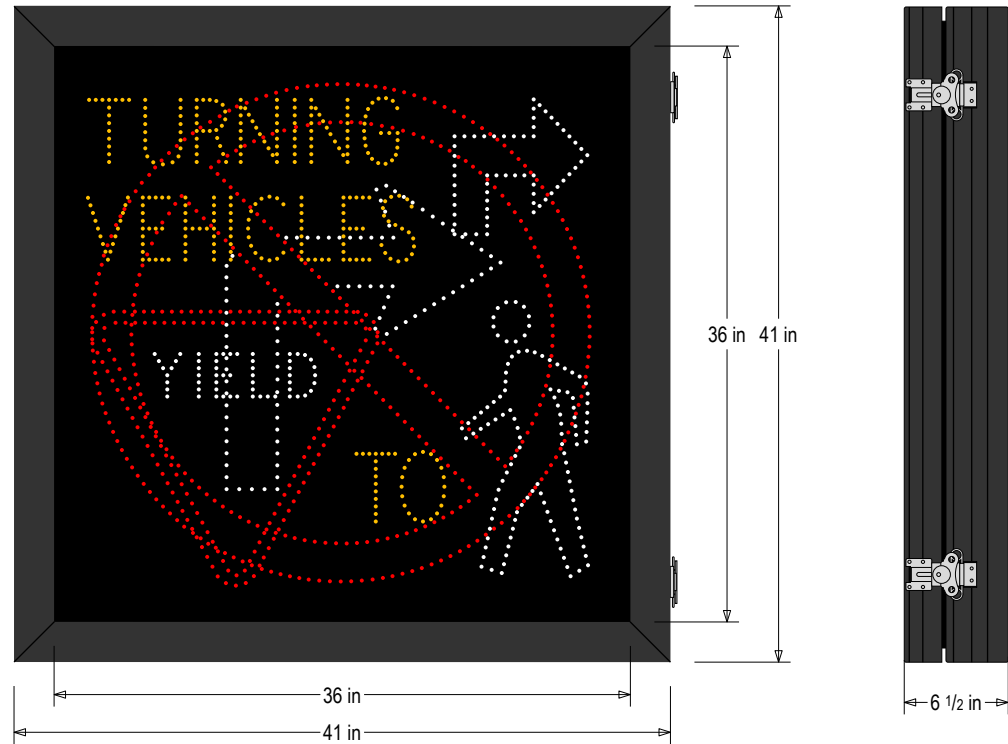

Sample Display Options

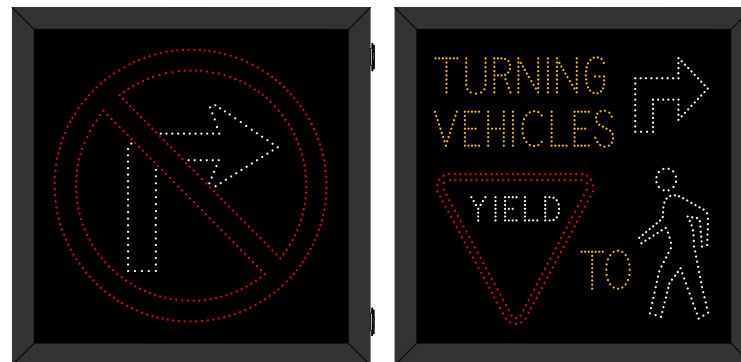

Frame Detail

