

PRODUCT ID: 67891
DOT LED Blank-Out Sign

MODEL
 DOT3838RAGW-S608/100-240VAC



DIMENSIONS
 38" H x 38" W x 6.5" D (est. 89.123 lbs)

CLASS
 Class: DOT Series
 Control Method: Switch (not included) or external relay.


CONSTRUCTION
 Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.
 Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.
 Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)
 Faces: Single Faced Sign
 Finish: Powdercoat Black

ELECTRICAL
 Input Voltage: 100-240 VAC
 Photodimming: IR photocells for auto photodimming
 Power Supplies: No Redundancy
 UL/cUL Listed: Listed for wet locations

MESSAGE
 Illumination: Super bright direct view LEDs. Message blanks out when off.
 Sign Messages: See message table below

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

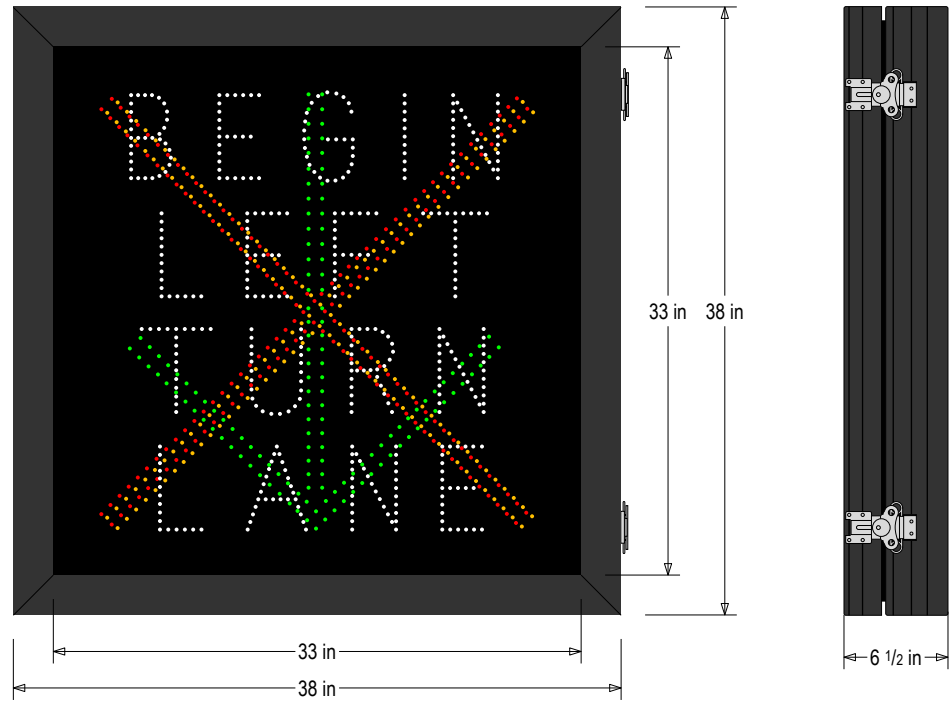


MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	27.0"	0.104-0.043
X	Amber Narrow Angle LED	27.0"	0.104-0.043
Down Arrow	Green Narrow Angle LED	27.0"	0.133-0.055
BEGIN LEFT TURN LANE	White Narrow Angle LED	5.25"	0.397-0.165

NOTE: Above messages are independently controlled.

Signal-Tech
 4985 Pittsburgh Ave.
 Erie, PA 16509
 Phone: (877) 547-9900
 Fax: (814) 835-2300
 Email: sales@signal-tech.com
 Website: www.signal-tech.com



Sample Display Options

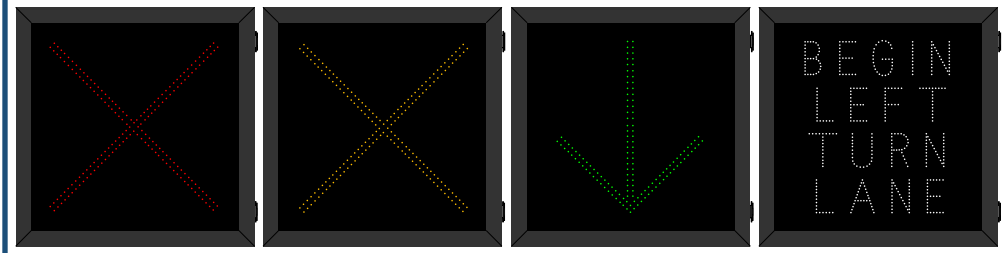

Frame Detail

