PRODUCT ID: 68202

DOT LED Blank-Out Sign

MODEL

DOT3535RWA-S692/100-240VAC

DIMENSIONS

35" H x 35" W x 6.5" D (est. 77.93 lbs)

CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep. Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign Finish: Powdercoat Black

ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: IR photocells for auto photodimming Power Supplies: No Redundancy

UL/cUL Listed: Listed for wet locations

MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

MESSAGE LED/COLOR | HEIGHT | AMPS No Left Turn Symbol Red, White Narrow Angle LED 26.25", 16.0" 0.245-0.102 Light Rail Symbol Amber Narrow Angle LED | 23.25" | 0.280-0.117

NOTE: Above messages are independently controlled.

Signal-Tech

4985 Pittsburgh Ave. Erie. PA 16509 Phone: (877) 547-9900


Fax: (814) 835-2300


Email: sales@signal-tech.com Website: www.signal-tech.com




Product View


NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

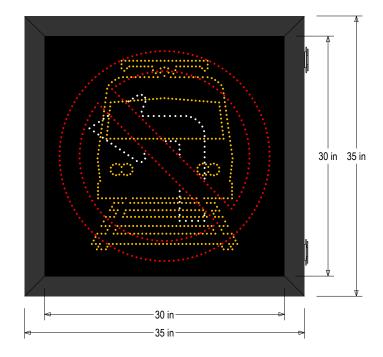




Sample Display Options







Copyright (C) 2024 Signal-Tech

02022024 | EMC