

Direct-View LED Traffic Controller HYB2424WGR-C4010

PRODUCT NUMBER

10874

CABINET DIMENSIONS

24" H x 24" W x 5.5" D

ILLUMINATION SOURCE

Super bright, wide viewing angle LEDs
Available in green, red, blue, amber, and white LEDs
Messages "blankout" when turned off, eliminating confusion
Long life, solid state lighting

ELECTRICAL

Integrated solid state power supply
Standard Voltage: 120 VAC, Optional Voltages: 9-36 V, 240 VAC, 277 VAC
Maximum amps per lighted message (at 120 V) shown in the table below
UL/CUL approved for wet locations
120V AC; Optional voltages 12V DC, 24V DC, 240V AC, 277V AC
1backlit board, 0.48 amps maximum
Switch and switch box installed.

CONSTRUCTION

Faces: Single Faced Sign
Extrusions: 5.5" deep mitered corrosion resistant aluminum housing with integrated hinged face.
Face Materials: 1/8" routed aluminum panel backed with 2 Impact Resistant, white lexan 1/8" thick faces (one of the two faces is a diffuser panel).
Vinyl Style: Vinyl is applied in a standard stencil cut style
Vinyl Color: Applied vinyl color is translucent Orange 3M Scotchcal #3630-44


FINISH

Standard Cabinet Color: RAL7022 Charcoal Gray.
Custom colors available upon request



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

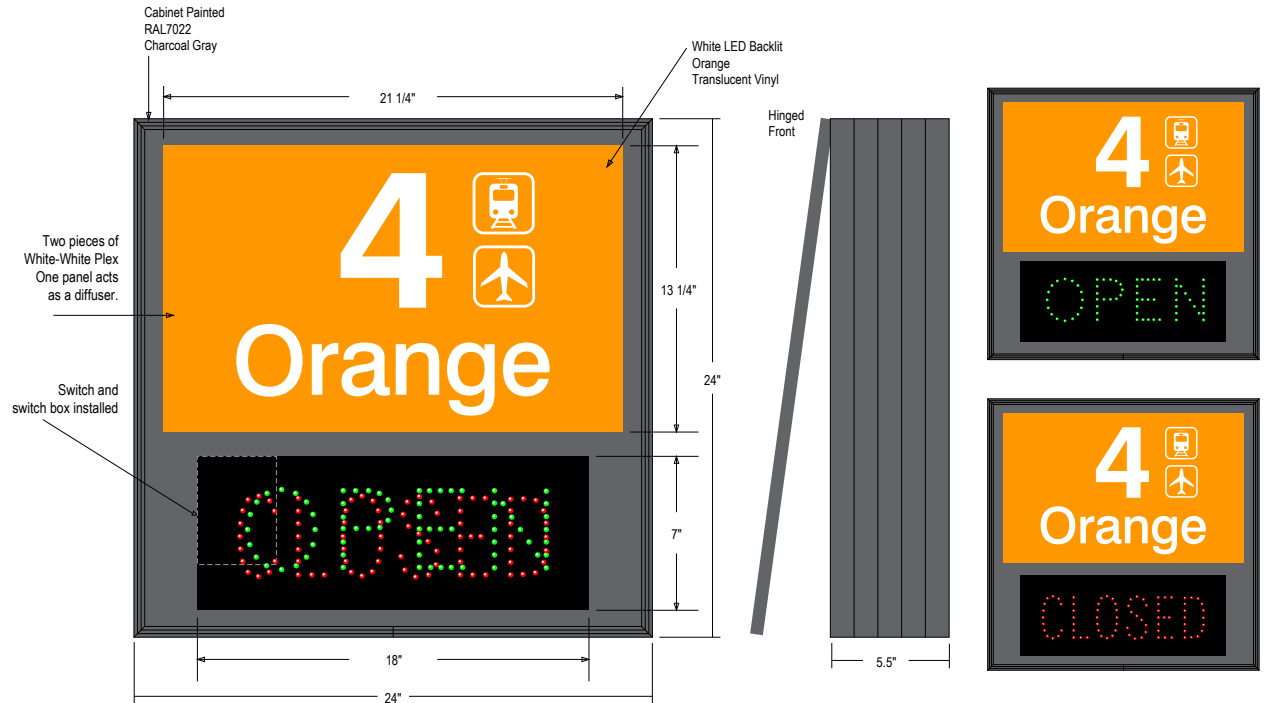

MESSAGE	COLOR	HEIGHT	AMPS
4 w/symbols	Orange Translucent Vinyl	7", 3.5"	0.48
OPEN	30° x 70° Green Oval	3.5"	0.03
CLOSED	30° x 70° Red Oval	3.5"	0.03

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com



Proudly Made in the USA