

**PRODUCT ID: 36379**  
Outdoor LED Backlit Sign

**MODEL**  
PHXF734WW-100GR/120-277VAC

**DIMENSIONS**  
7" H x 34" W x 2.5" D (est. 5.799 lbs)



**CLASS**  
**CLASS:** PHXF Series  
**Control Method:** Switch (not included) or external relay.

**CONSTRUCTION**  
**Back Construction:** 0.050" Lift-n-Shift Back  
**Cabinet:** 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.  
**Face Material:** 1/8" thick, impact modified acrylic (0000)  
**Faces:** Single Faced Sign  
**Finish:** Duranodic Bronze  
**Graphic:** Printed graphic applied to surface  
**Mounting Channel:** None

**ELECTRICAL**  
**Flashing:** Not Included  
**Input Voltage:** 120-277 VAC  
**UL/cUL Listed:** Listed for wet locations

**MESSAGE**  
**Color:** Refer to message table (Red and Green Opaque)  
**Font:** DIN Condensed Bold  
**Illumination:** White high intensity LED backlit. Message always visible.  
**Sign Messages:** See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
OPEN	White Wide Angle	3.75"	0.240-0.104
CLOSED	White Wide Angle	3.75"	0.240-0.104


NOTE: Above messages are independently controlled.

**Signal-Tech**  
4985 Pittsburgh Ave.  
Erie, PA 16509  
Phone: (877) 547-9900  
Fax: (814) 835-2300  
Email: sales@signal-tech.com  
Website: www.signal-tech.com



**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

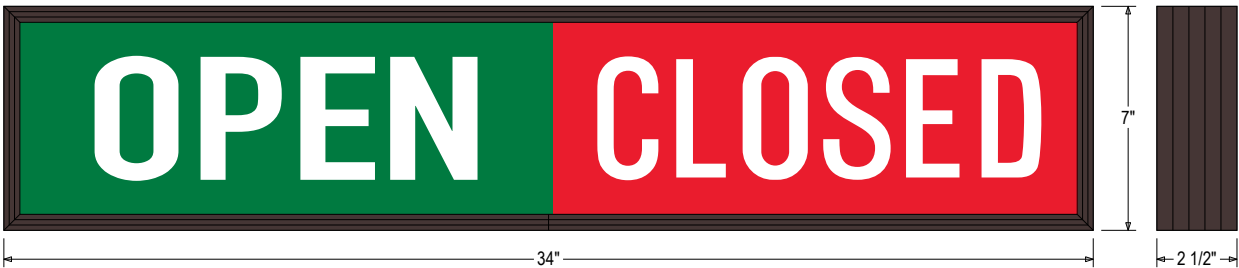

**Sample Display Options**



Frame Detail

