

Incandescent Traffic Signal TCL721RAG-226

PRODUCT NUMBER

5941

CABINET DIMENSIONS

7" H x 21" W x 2.5" D

ILLUMINATION SOURCE

Super bright, wide viewing angle LEDs
Available in green, red, blue, amber, and white LEDs
Messages "blankout" when turned off, eliminating confusion
Long life, up to 100,000+ hours

ELECTRICAL

Integrated solid state power supply
Standard Voltage: 120 VAC, Optional Voltages: 9-36 V, 240 VAC, 277 VAC
Maximum amps per lighted message (at 120 V) shown in the table below
UL/CUL approved for wet locations

CONSTRUCTION

Faces: Single Faced Sign
Extrusions (TCL): Slim line continuous, corrosion resistant, aluminum housing 2.5" deep
Face Material: Impact Resistant, Red Polycarbonate 1/8" thick, Amber Polycarbonate 1/8" thick, Green Polycarbonate 1/8" thick.


FINISH

Standard Cabinet Color: Duranodic Bronze
Custom colors available upon request



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

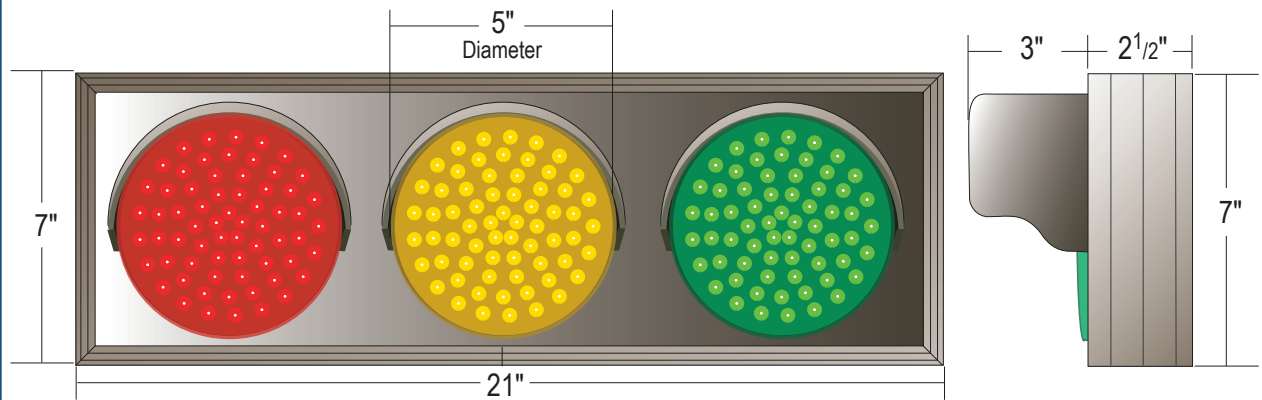


MESSAGE

COLOR

HEIGHT

AMPS

MESSAGE	COLOR	HEIGHT	AMPS
Red Indicator Dot	Red	5"	0.44
Amber Indicator Dot	Amber	5"	0.44
Green Indicator Dot	Green	5"	0.44

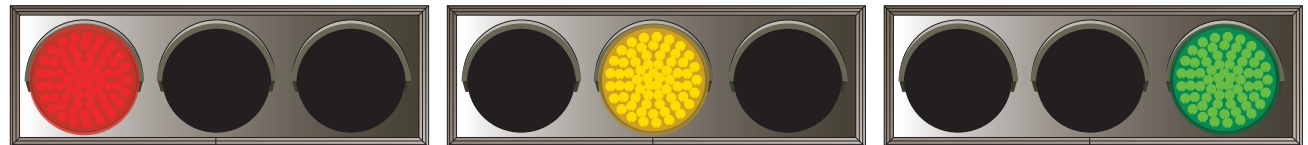

Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300

Email: sales@signal-tech.com

Website: www.signal-tech.com



Proudly Made in the USA