

PRODUCT ID: 67889

DOT LED Blank-Out Sign

MODEL

DOT3838WGRA-S607/100-240VAC



DIMENSIONS

38" H x 38" W x 6.5" D (est. 87.913 lbs)

CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.

Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.

Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: IR photocells for auto photodimming

Power Supplies: No Redundancy

UL/cUL Listed: Listed for wet locations


MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

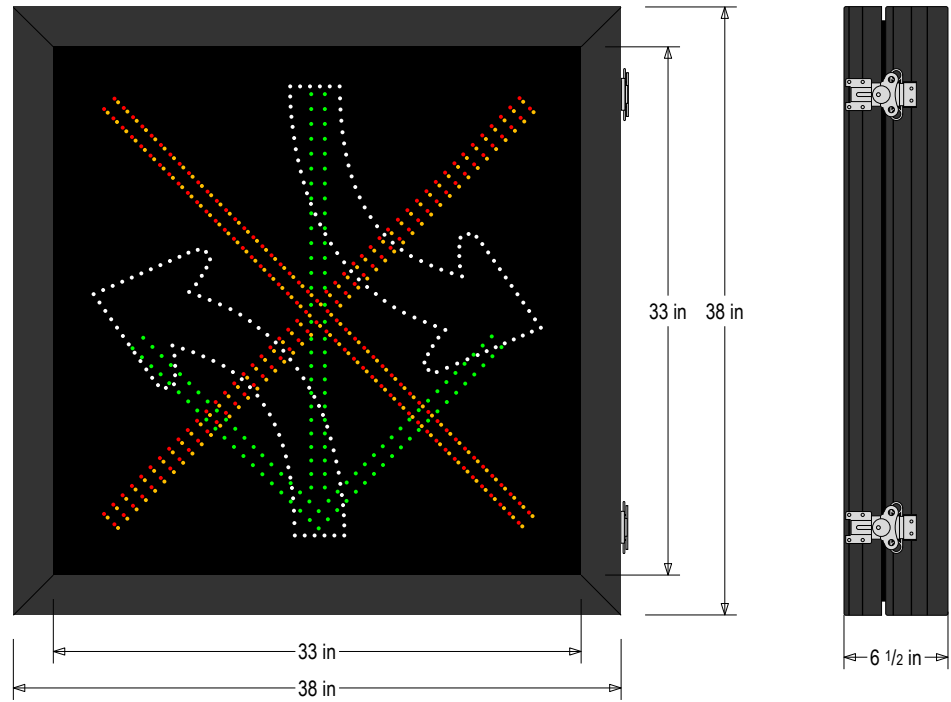

MESSAGE

LED/COLOR

HEIGHT

AMPS

Center Lane Veering Arrows	White Narrow Angle LED	28.0"	0.173-0.072
Down Arrow	Green Narrow Angle LED	27.0"	0.133-0.055
X	Red Narrow Angle LED	26.75"	0.104-0.043
X	Amber Narrow Angle LED	26.75"	0.104-0.043

NOTE: Above messages are independently controlled.

Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900


Fax: (814) 835-2300

Email: sales@signal-tech.com

Website: www.signal-tech.com



Sample Display Options

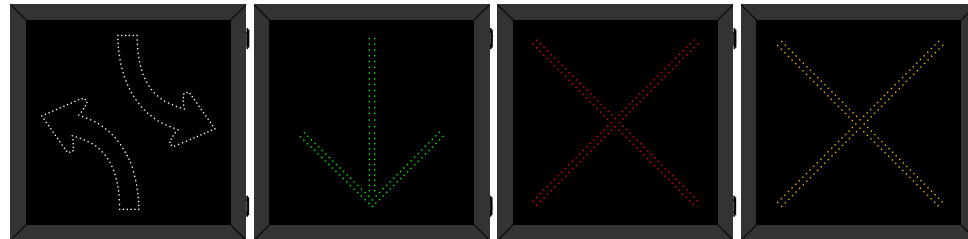

Frame Detail

