## PRODUCT ID: 67954

DOT LED Blank-Out Sign

#### MODEL

DOT2923RW-D602/100-240VAC



#### DIMENSIONS

29" H x 23" W x 6.5" D (est. 51.147 lbs)

### **CLASS**

Class: DOT Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep. Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign Finish: Powdercoat Black

#### **ELECTRICAL**

Input Voltage: 100-240 VAC

Photodimming: IR photocells for auto photodimming Power Supplies: Redundant

UL/cUL Listed: Listed for wet locations

#### **MESSAGE**

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

#### **MESSAGE** LED/COLOR | HEIGHT | AMPS

No Right Turn Symbol w/ TRAIN Red, White Narrow Angle LED | 15.5", 10.0", 4.5" | 0.317-0.132

NOTE: Above messages are independently controlled.

#### Signal-Tech

4985 Pittsburgh Ave. Erie, PA 16509 Phone: (877) 547-9900


Fax: (814) 835-2300


Email: sales@signal-tech.com Website: www.signal-tech.com



# **Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

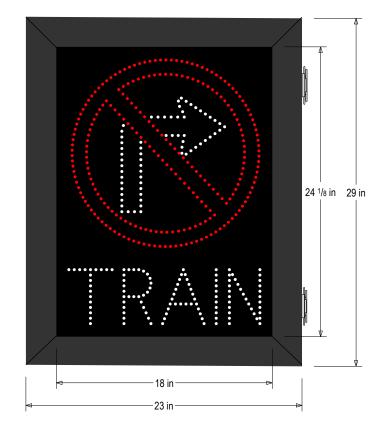



Frame Detail

