PRODUCT ID: 68798

DOT LED Blank-Out Sign

MODEL DOT3535AWR-S884/100-240VAC



DIMENSIONS 35" H x 35" W x 6.5" D (est. 78.21 lbs)

CLASS Class: DOT Series Control Method: Switch (not included) or external relay.

CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep. Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109) Faces: Single Faced Sign Finish: Powdercoat Black

ELECTRICAL

Input Voltage: 100-240 VAC Photodimming: IR photocells for auto photodimming Power Supplies: No Redundancy UL/cUL Listed: Listed for wet locations

MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off. Sign Messages: See message table below

MESSAGE LED/COLOR HEIGHT AMPS


TURNIG LENCLES w/ Vesing Right Amov & Bonter YELD TO Petestian Symbol Boyck Yeld Symbol Amber, White, Red Narrow Angle LED 17.127.027.025.025.025 0.613-0.255

NOTE: Above messages are independently controlled.

Signal-Tech 4985 Pittsburgh Ave. Erie, PA 16509 Phone: (877) 547-9900 Fax: (814) 835-2300 Email: sales@signal-tech.com Website: www.signal-tech.com



Product View

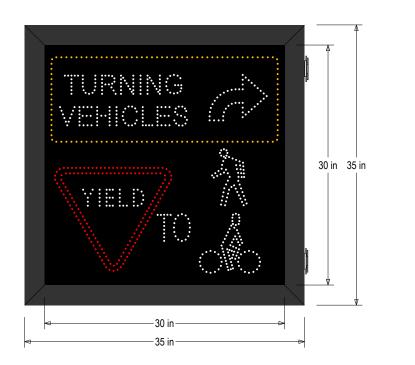

∵ • 6 1/2 in - ►

≣⊙((|:

Frame Detail



NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.