## PRODUCT ID: 12540

Outdoor Blank-out LED Direct-view Sign

#### **MODEL**

TCL1426R-C790/120-277VAC



#### **DIMENSIONS**

14" H x 26" W x 2.5" D (est. 9.741 lbs)

### **CLASS**

CLASS: TCL Series

Control Method: Switch (not included) or external relay.

### **CONSTRUCTION**

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep. Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign Finish: Duranodic Bronze Mounting Channel: None

### **ELECTRICAL**

Flashing: Not Included Input Voltage: 120-277 VAC Photodimming: None UL/cUL Listed: Listed for wet locations

#### **MESSAGE**

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	<b>AMPS</b>
SLOW DOWN	Red Wide Angle LED	5.0"	0.108-0.047

NOTE: Above messages are independently controlled.

#### Signal-Tech

4985 Pittsburgh Ave. Erie, PA 16509 Phone: (877) 547-9900


Fax: (814) 835-2300

Email: sales@signal-tech.com Website: www.signal-tech.com



# **Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

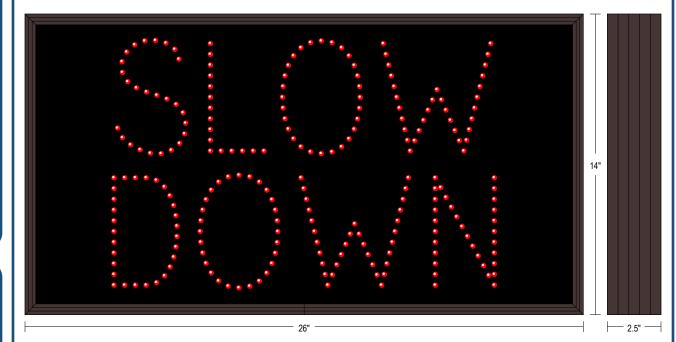

Frame Detail

