

**PRODUCT ID: 13068**  
**DOT LED Blank-Out Sign**

**MODEL**  
DOT2167GR-100DSH/100-240VAC



**DIMENSIONS**  
21" H x 67" W x 5" D (est. 99.675 lbs)

**CLASS**  
**Class:** DOT Series  
**Control Method:** Switch (not included) or external relay.

**CONSTRUCTION**  
**Cabinet:** Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.  
**Face Material:** Replaceable 1/4" thick smoke-tinted polycarbonate (5109)  
**Faces:** Single Faced Sign  
**Finish:** Powdercoat Black  
**Integral Hood:** Single piece 1/8" brake formed aluminum hood. Depth (13.0" Deep)  
**Mounting Channel:** None

**ELECTRICAL**  
**Input Voltage:** 100-240 VAC  
**Photodimming:** (3) Redundant fail-safe photocells for auto photodimming  
**Power Supplies:** Redundant  
**UL/cUL Listed:** Listed for wet locations

**MESSAGE**  
**Illumination:** Super bright direct view LEDs. Message blanks out when off.  
**Sign Messages:** See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
OPEN	Green Narrow Angle LED	12.0"	0.213-0.089
CLOSED	Red Narrow Angle LED	12.0"	0.162-0.067


NOTE: Above messages are independently controlled.

**Signal-Tech**  
4985 Pittsburgh Ave.  
Erie, PA 16509  
Phone: (877) 547-9900  
Fax: (814) 835-2300  
Email: sales@signal-tech.com  
Website: www.signal-tech.com



**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

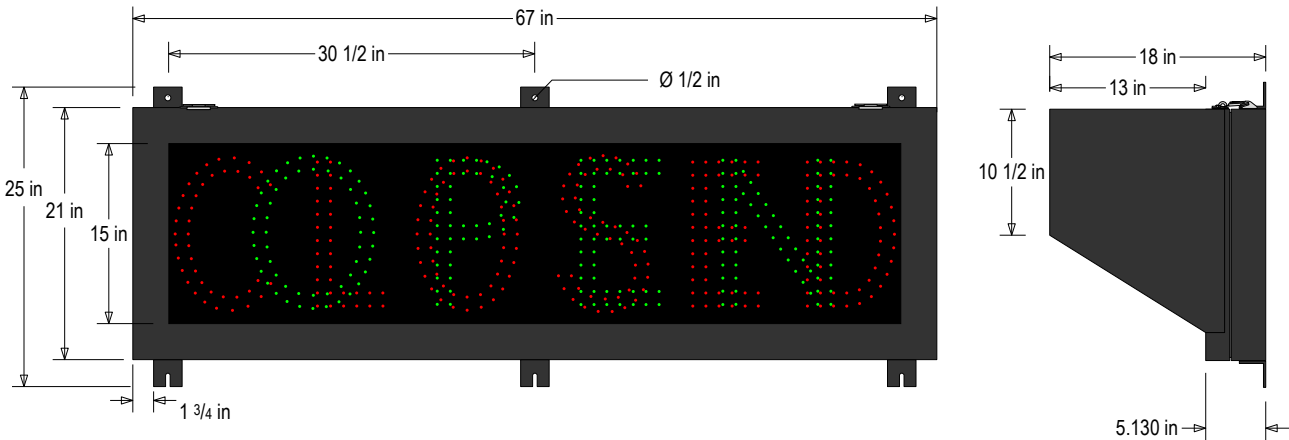

**Sample Display Options**

