PRODUCT ID: 14928

Outdoor Blank-out LED Direct-view Sign

MODEL

TCL1434R-2S/3S-125/120-277VAC

DIMENSIONS

14" H x 34" W x 2.5" D (est. 11.307 lbs)

CLASS

CLASS: TCL Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep. Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign Finish: Duranodic Bronze Mounting Channel: None

ELECTRICAL

Flashing: Not Included Input Voltage: 120-277 VAC Photodimming: None
UL/cUL Listed: Listed for wet locations

MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

LED/COLOR | HEIGHT | AMPS **MESSAGE**

ATM Red Wide Angle LED | Double Stroke Trick Stroke 9.1" | 0.165-0.072

NOTE: Above messages are independently controlled.

Signal-Tech

4985 Pittsburgh Ave. Erie, PA 16509 Phone: (877) 547-9900


Fax: (814) 835-2300 Email: sales@signal-tech.com

Website: www.signal-tech.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

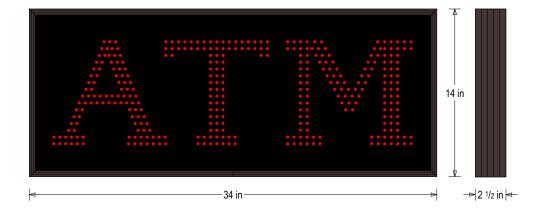

Frame Detail

