

PRODUCT ID: 29787  
DOT LED Blank-Out Sign

MODEL  
DOT3030DRAG-B295/100-240VAC



DIMENSIONS  
30" H x 30" W x 11.5" D (est. 93.483 lbs)

CLASS  
Class: DOT Series  
Control Method: Switch (not included) or external relay.

CONSTRUCTION  
Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.  
Two hinged doors with 1" silicone gasket, tool-less stainless-steel latches 11.5" Deep.  
Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)  
Faces: Double Faced Sign  
Finish: Powdercoat Black  
Integral Hood: Optional hood available  
Mounting Channel: None

ELECTRICAL  
Input Voltage: 100-240 VAC  
Photodimming: (3) Redundant fail-safe photocells for auto photodimming  
Power Supplies: Redundant  
UL/cUL Listed: Listed for wet locations

MESSAGE  
Illumination: Super bright direct view LEDs. Message blanks out when off.  
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	20.0" Five Stroke	0.222-0.093
X	Amber Narrow Angle LED	20.0" Five Stroke	0.222-0.093
Down Arrow	Green Narrow Angle LED	21.0" Triple Stroke	0.216-0.090
X	Red Narrow Angle LED	20.0" Five Stroke	0.222-0.093
X	Amber Narrow Angle LED	20.0" Five Stroke	0.222-0.093
Down Arrow	Green Narrow Angle LED	21.0" Triple Stroke	0.216-0.090


NOTE: Above messages are independently controlled.

Signal-Tech  
4985 Pittsburgh Ave.  
Erie, PA 16509  
Phone: (877) 547-9900  
Fax: (814) 835-2300  
Email: sales@signal-tech.com  
Website: www.signal-tech.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

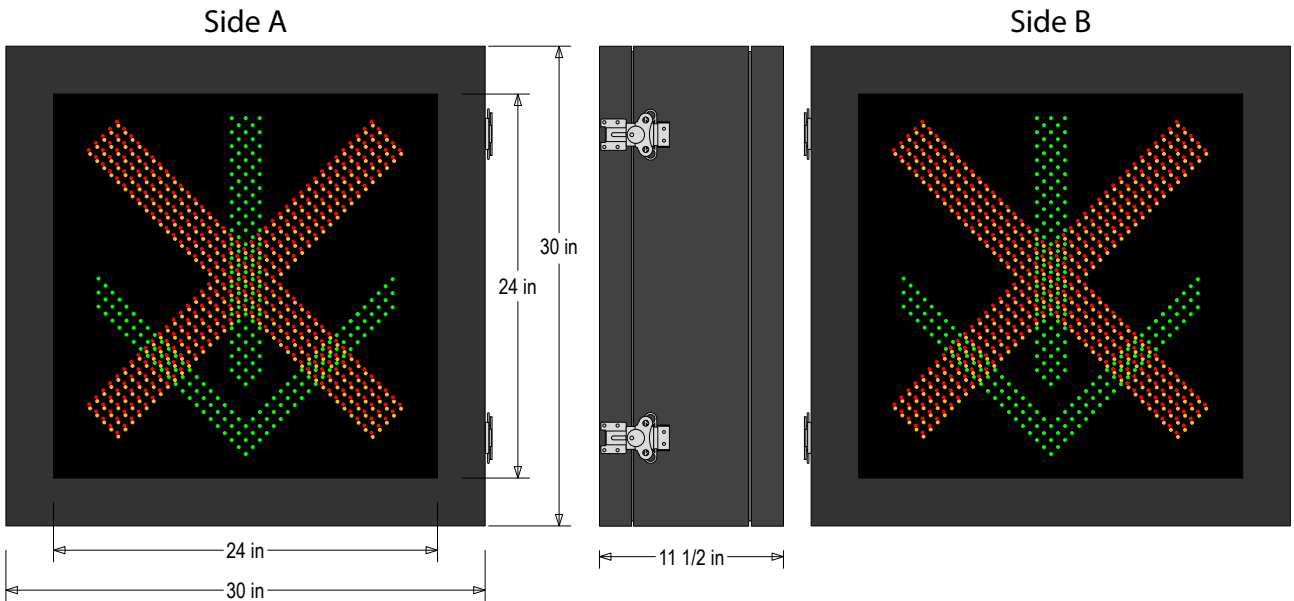

Sample Display Options

