

PRODUCT ID: 29787
DOT LED Blank-Out Sign

MODEL
 DOT3030DRAG-B295



DIMENSIONS
 30" H x 30" W x 11.5" D (est. 74.783 lbs)

CLASS
 Class: DOT Series
 Control Method: Switch (not included) or external relay.


CONSTRUCTION
 Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.
 Two hinged doors with 1" silicone gasket, tool-less stainless-steel latches 11.5" Deep.
 Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)
 Faces: Double Faced Sign
 Finish: Powdercoat Black
 Integral Hood: Optional hood available
 Mounting Channel:

ELECTRICAL
 Input Voltage: 100-240 VAC
 Photodimming: (3) Redundant fail-safe photocells for auto photodimming
 Power Supplies: Redundant
 UL/cUL Listed: Listed for wet locations


MESSAGE
 Illumination: Super bright direct view LEDs. Message blanks out when off.
 Sign Messages: See message table below

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

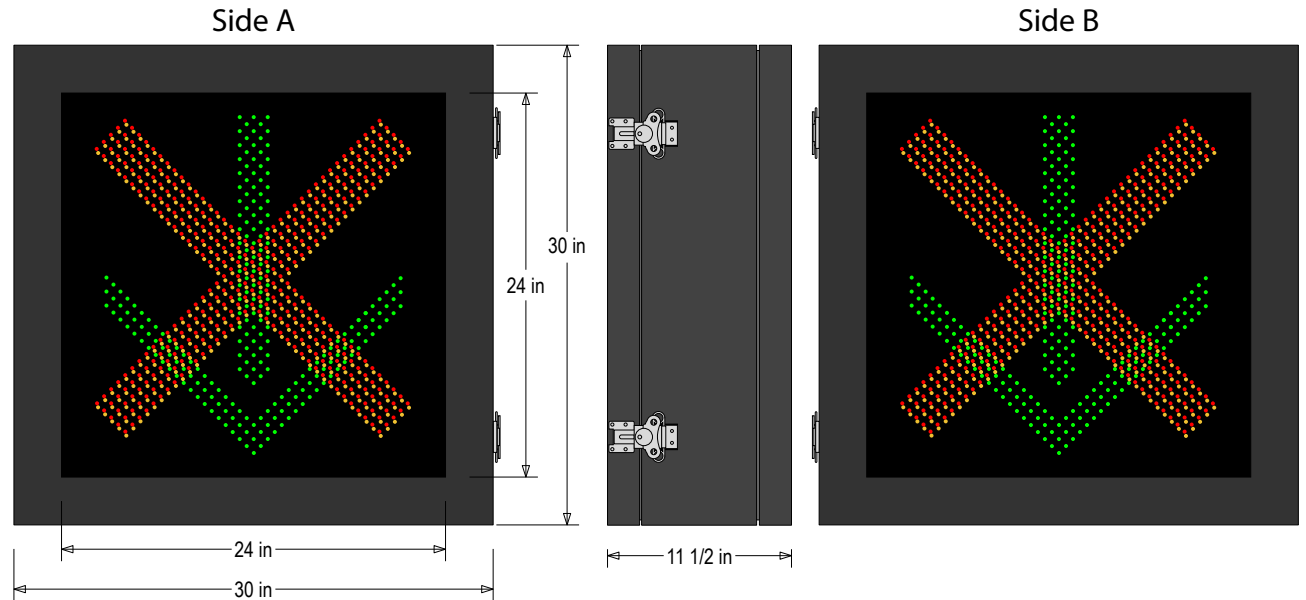

Sample Display Options

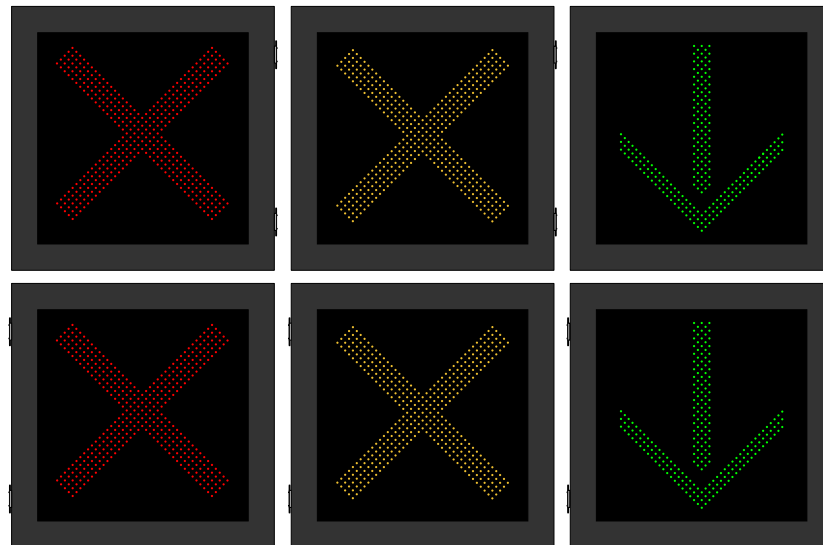

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	20.0" Five Stroke	0.222-0.093
X	Amber Narrow Angle LED	20.0" Five Stroke	0.222-0.093
Down Arrow	Green Narrow Angle LED	21.0" Triple Stroke	0.216-0.090
X	Red Narrow Angle LED	20.0" Five Stroke	0.222-0.093
X	Amber Narrow Angle LED	20.0" Five Stroke	0.222-0.093
Down Arrow	Green Narrow Angle LED	21.0" Triple Stroke	0.216-0.090

NOTE: Above messages are independently controlled.

Signal-Tech
 4985 Pittsburgh Ave.
 Erie, PA 16509
 Phone: (877) 547-9900
 Fax: (814) 835-2300
 Email: sales@signal-tech.com
 Website: www.signal-tech.com



Proudly Made in the USA