

**PRODUCT ID: 29787**  
**DOT LED Blank-Out Sign**

**MODEL**  
 DOT3030DRAG-B295



**DIMENSIONS**  
 30" H x 30" W x 11.5" D (est. 86.911 lbs)

**CLASS**  
 Class: DOT Series  
 Control Method: Switch (not included) or external relay.


**CONSTRUCTION**  
 Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.  
 Two hinged doors with 1" silicone gasket, tool-less stainless-steel latches 11.5" Deep.  
 Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)  
 Faces: Double Faced Sign  
 Finish: Powdercoat Black  
 Integral Hood: Optional hood available  
 Mounting Channel: None

**ELECTRICAL**  
 Input Voltage: 100-240 VAC  
 Photodimming: (3) Redundant fail-safe photocells for auto photodimming  
 Power Supplies: Redundant  
 UL/cUL Listed: Listed for wet locations


**MESSAGE**  
 Illumination: Super bright direct view LEDs. Message blanks out when off.  
 Sign Messages: See message table below

**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

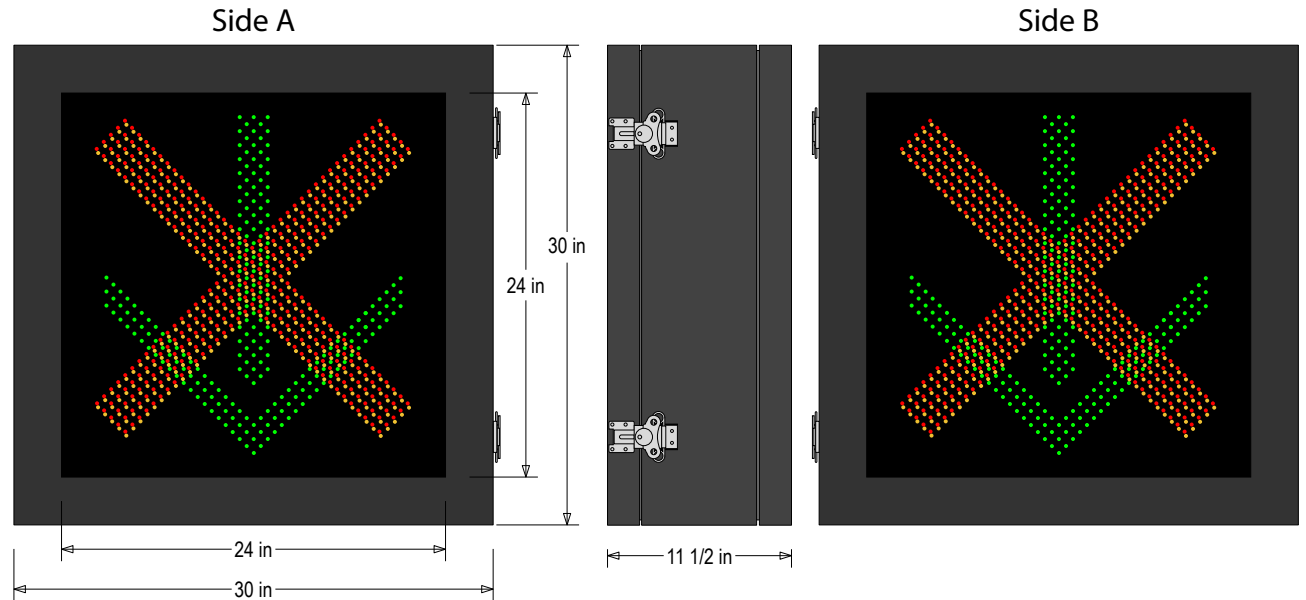

**Sample Display Options**

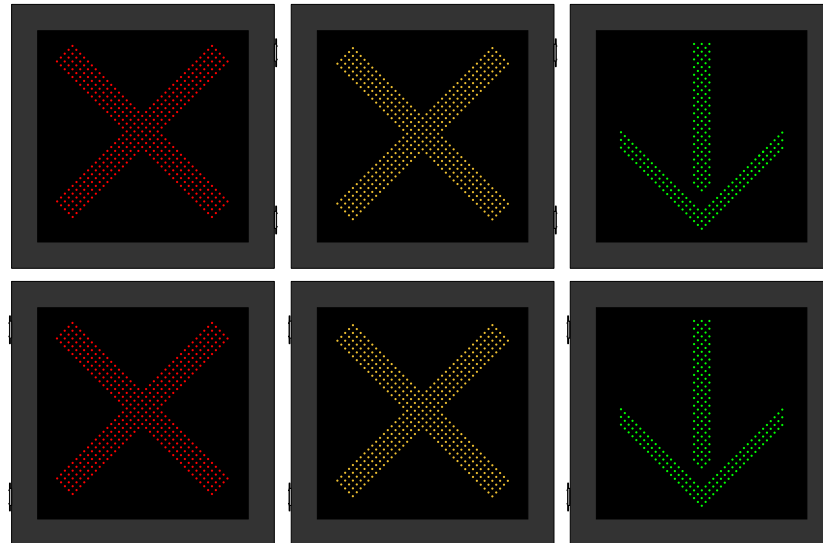

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	20.0" Five Stroke	0.222-0.093
X	Amber Narrow Angle LED	20.0" Five Stroke	0.222-0.093
Down Arrow	Green Narrow Angle LED	21.0" Triple Stroke	0.216-0.090
X	Red Narrow Angle LED	20.0" Five Stroke	0.222-0.093
X	Amber Narrow Angle LED	20.0" Five Stroke	0.222-0.093
Down Arrow	Green Narrow Angle LED	21.0" Triple Stroke	0.216-0.090

NOTE: Above messages are independently controlled.

**Signal-Tech**  
 4985 Pittsburgh Ave.  
 Erie, PA 16509  
 Phone: (877) 547-9900  
 Fax: (814) 835-2300  
 Email: sales@signal-tech.com  
 Website: www.signal-tech.com



Proudly Made in the USA