

## PRODUCT ID: 33494

### DOT LED Blank-Out Sign

#### MODEL

DOT4024RGB-I370/100-240VAC



#### DIMENSIONS

40" H x 24" W x 5" D (est. 60.936 lbs)

#### CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.

Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.

Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

Integral Hood: Optional hood available

Mounting Channel: None

#### ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: (3) Redundant fail-safe photocells for auto photodimming

Power Supplies: Redundant

UL/cUL Listed: Listed for wet locations


#### MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.


Sign Messages: See message table below

## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

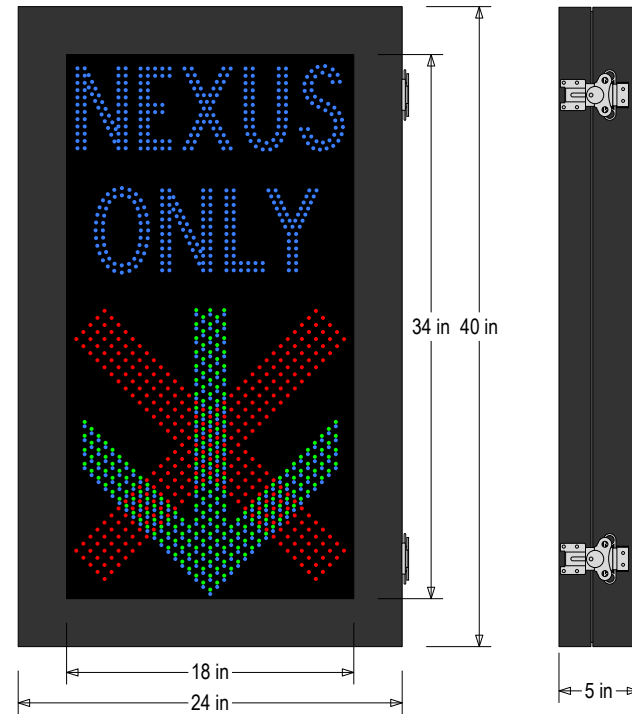

Sample Display Options

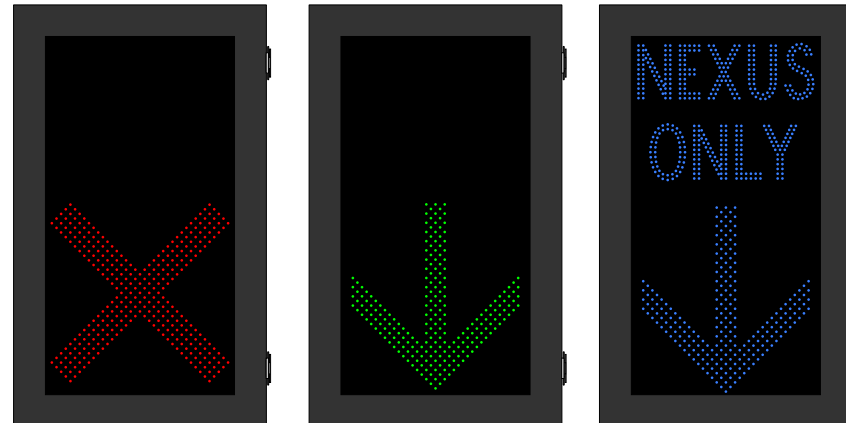

MESSAGE	LED/COLOR	HEIGHT	AMPS
---------	-----------	--------	------

X	Red Narrow Angle LED	18.0"	0.187-0.078
Down Arrow	Green Narrow Angle LED	18.0"	0.222-0.093
NEXUS ONLY w/Down Arrow	Blue Wide Angle LED	5.0", 17.5"	0.640-0.267

NOTE: Above messages are independently controlled.

#### Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300

Email: sales@signal-tech.com

Website: www.signal-tech.com

