

## PRODUCT ID: 40249

### Outdoor Blank-out LED Backlit Sign

#### MODEL

PHX1434WGR-K375



#### DIMENSIONS

14" H x 34" W x 2.25" D (est. 9.382 lbs)

#### CLASS

Class: PHX Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.25" deep.

Face Material: 1/8" thick, dark grey diffused acrylic

Faces: Single Faced Sign

Finish: Duranodic Bronze

Mounting Channel:

#### ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

#### MESSAGE

Color: Black opaque


Font: Swiss 721 Bold BT

Illumination: Backlit with high intensity LEDs. Message blanks out when off

Sign Messages: See message table below

## Product View


NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

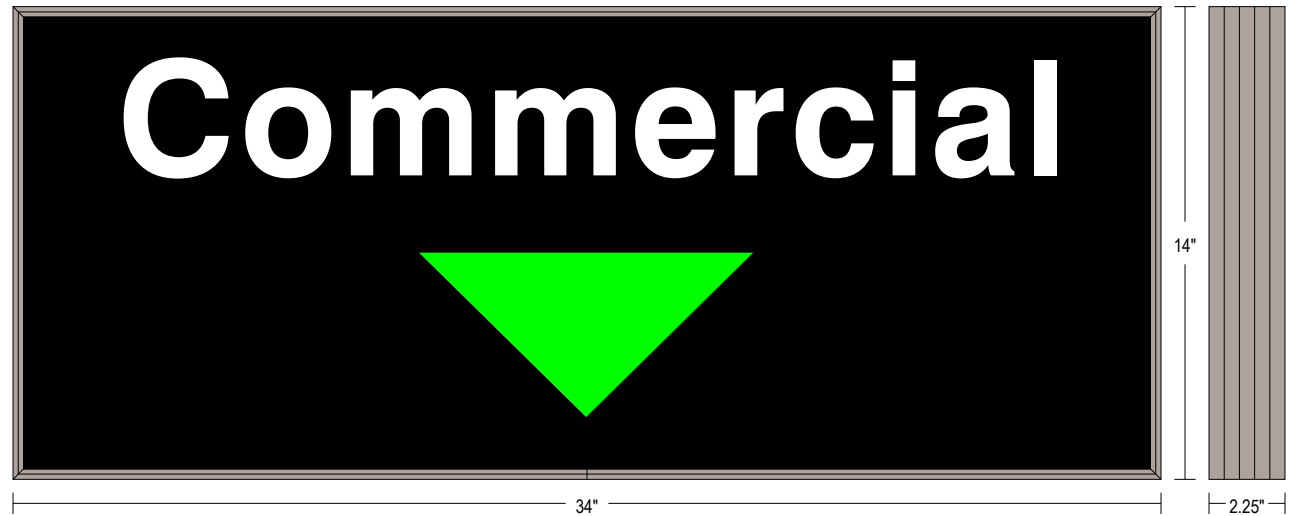

MESSAGE	LED/COLOR	HEIGHT	AMPS
Commercial	White Wide Angle LED	3.5"	0.325-0.141
Red Triangle	Red Wide Angle LED	3.7"	0.245-0.106
Green Triangle	Green Wide Angle LED	3.7"	0.368-0.159

NOTE: Above messages are independently controlled.

### Sample Display Options

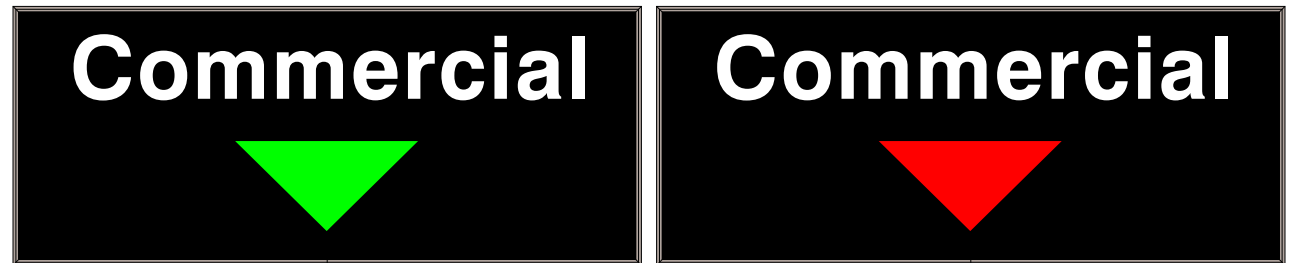

#### Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300

Email: [sales@signal-tech.com](mailto:sales@signal-tech.com)

Website: [www.signal-tech.com](http://www.signal-tech.com)



Proudly Made in the USA