

**PRODUCT ID: 43956**  
**DOT LED Blank-Out Sign**

**MODEL**  
DOT3636ARW-D807/100-240VAC



**DIMENSIONS**  
36" H x 36" W x 5" D (est. 73.685 lbs)

**CLASS**  
Class: DOT Series  
Control Method: Switch (not included) or external relay.

**CONSTRUCTION**  
Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.  
Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)  
Faces: Single Faced Sign  
Finish: Powdercoat Black  
Integral Hood: Optional hood available  
Mounting Channel: None

**ELECTRICAL**  
Input Voltage: 100-240 VAC  
Photodimming: (3) Redundant fail-safe photocells for auto photodimming  
Power Supplies: Redundant  
UL/cUL Listed: Listed for wet locations

**MESSAGE**  
Illumination: Super bright direct view LEDs. Message blanks out when off.  
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
W10-7 Train Symbol	Amber Narrow Angle LED	23.25"	0.288-0.120
No Left Turn Symbol	Red, White Narrow Angle LED	24.25", 15.0"	0.251-0.105


NOTE: Above messages are independently controlled.

**Signal-Tech**  
4985 Pittsburgh Ave.  
Erie, PA 16509  
Phone: (877) 547-9900  
Fax: (814) 835-2300  
Email: sales@signal-tech.com  
Website: www.signal-tech.com



**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

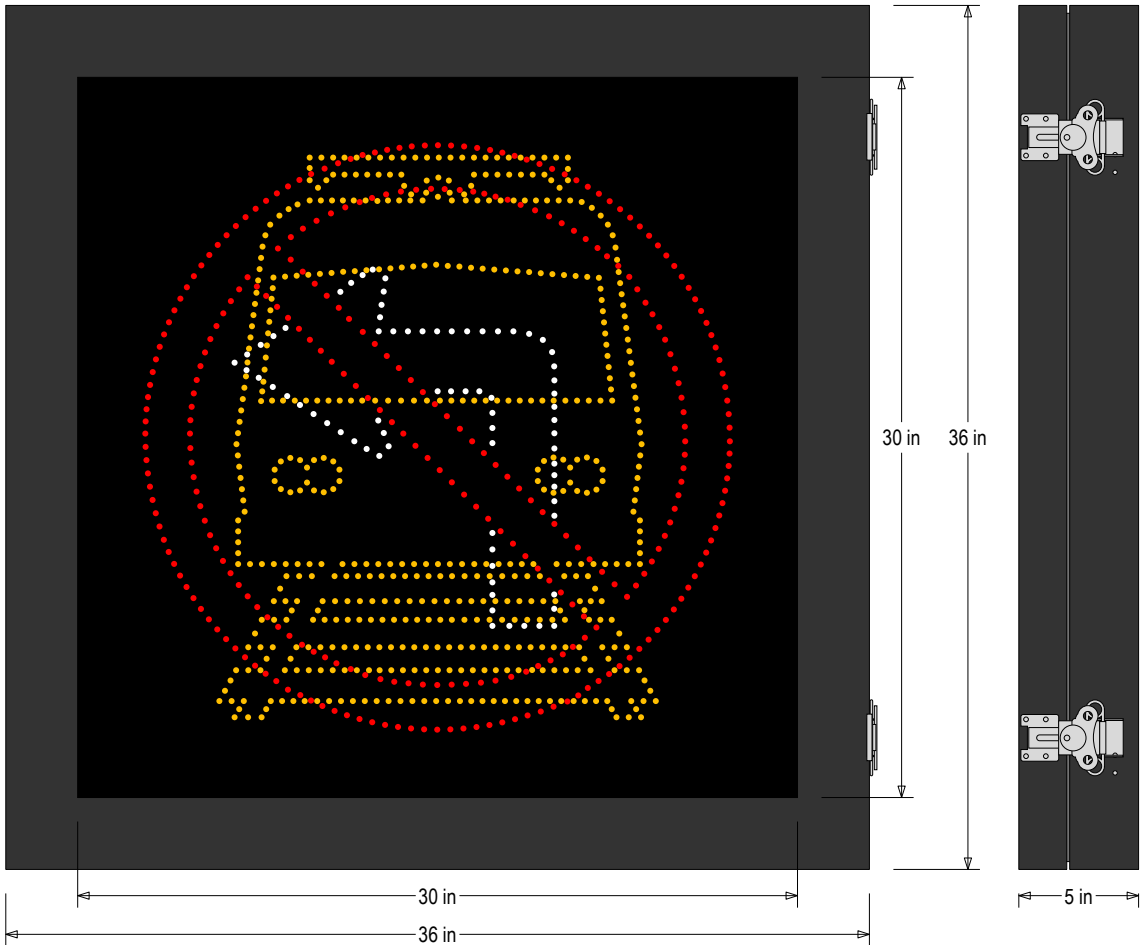

Sample Display Options

