

PRODUCT ID: 43957
DOT LED Blank-Out Sign

MODEL
DOT2424DRAR-F292/100-240VAC

DIMENSIONS
24" H x 24" W x 11.5" D (est. 76.632 lbs)



CLASS
Class: DOT Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.
Two hinged doors with 1" silicone gasket, tool-less stainless-steel latches 11.5" Deep.
Face Material: Replaceable 1/4" thick, dark grey polycarbonate (I35)
Faces: Double Faced Sign
Finish: Powdercoat Black
Integral Hood: Optional hood available
Mounting Channel: None

ELECTRICAL
Input Voltage: 100-240 VAC
Photodimming: (3) Redundant fail-safe photocells for auto photodimming
Power Supplies: Redundant
UL/cUL Listed: Listed for wet locations

MESSAGE
Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Left Arrow	Red Narrow Angle LED	2.5"	0.026-0.011
Light Rail Symbol	Amber Narrow Angle LED	5.5"	0.155-0.065
Right Arrow	Amber Narrow Angle LED	2.5"	0.026-0.011
Right Arrow	Red Narrow Angle LED	2.5"	0.026-0.011
Light Rail Symbol	Amber Narrow Angle LED	5.5"	0.155-0.065
Left Arrow	Amber Narrow Angle LED	2.5"	0.026-0.011



NOTE: Above messages are independently controlled.

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

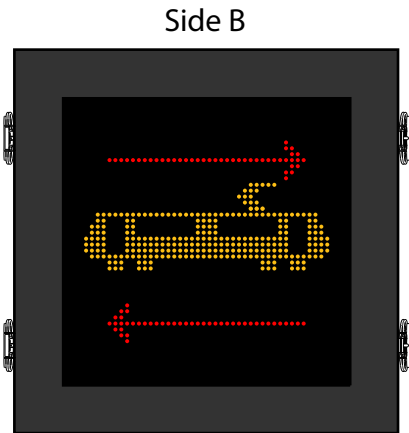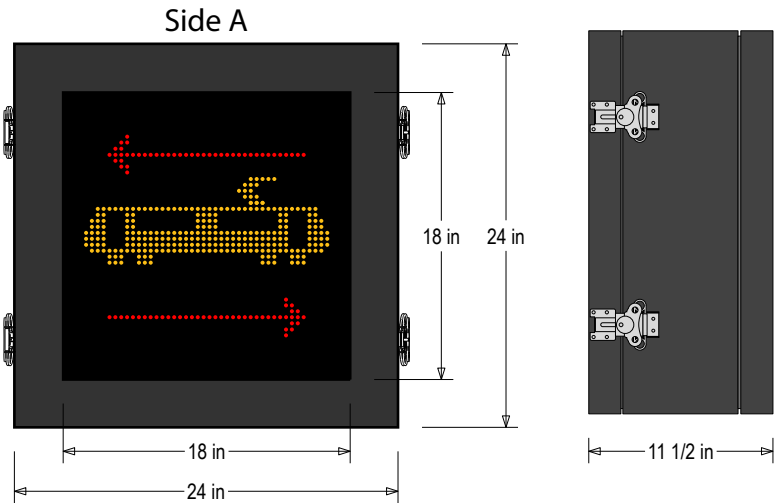

Sample Display Options

