

# PRODUCT ID: 44389

## DOT LED Blank-Out Sign

### MODEL

DOT2424DARRW-L560/100-240VAC



### DIMENSIONS

24" H x 24" W x 11.5" D (est. 70.746 lbs)

### CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

### CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Two hinged doors with 1" silicone gasket, tool-less stainless-steel latches 11.5" Deep.

Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)

Faces: Double Faced Sign

Finish: Powdercoat Black

Integral Hood: Optional hood available

Mounting Channel: None

### ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: (3) Redundant fail-safe photocells for auto photodimming

Power Supplies: Redundant

UL/cUL Listed: Listed for wet locations

### MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Light Rail Symbol	Amber Narrow Angle LED	5.5"	0.155-0.065
Left/Right Arrow	Red Narrow Angle LED	2.5"	0.032-0.013
2ND	Red Narrow Angle LED	2.5"	0.032-0.013
TRAIN	White Narrow Angle LED	2.5"	0.069-0.029
Light Rail Symbol	Amber Narrow Angle LED	5.5"	0.155-0.065
Left/Right Arrow	Red Narrow Angle LED	2.5"	0.032-0.013
2ND	Red Narrow Angle LED	2.5"	0.032-0.013
TRAIN	White Narrow Angle LED	2.5"	0.069-0.029

NOTE: Above messages are independently controlled.

### Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300

Email: sales@signal-tech.com


Website: www.signal-tech.com



Proudly Made in the USA

## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

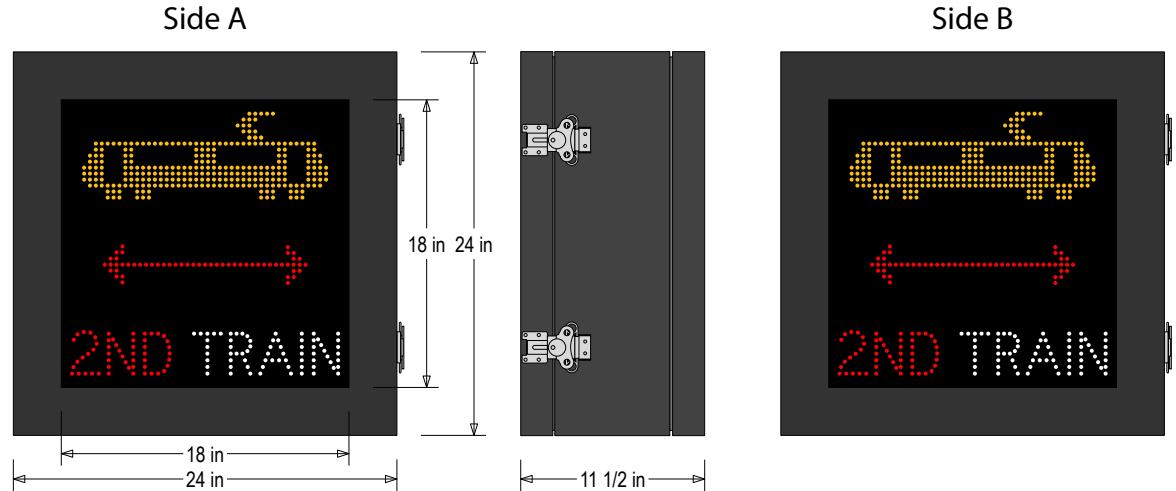

### Sample Display Options

