

PRODUCT ID: 46294

DOT LED Blank-Out Sign

MODEL

DOT2167WW-100DSH/100-240VAC



DIMENSIONS

21" H x 67" W x 5" D (est. 98.282 lbs)

CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.

Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.

Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

Integral Hood: Single piece 1/8" brake formed 6" deep aluminum hood

Mounting Channel: None

ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: (3) Redundant fail-safe photocells for auto photodimming

Power Supplies: Redundant

UL/cUL Listed: Listed for wet locations


MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.


Sign Messages: See message table below

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

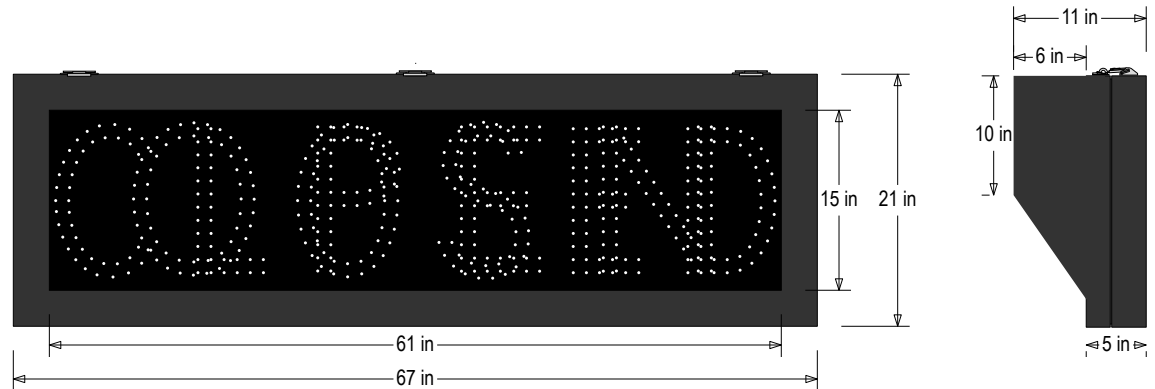

Sample Display Options

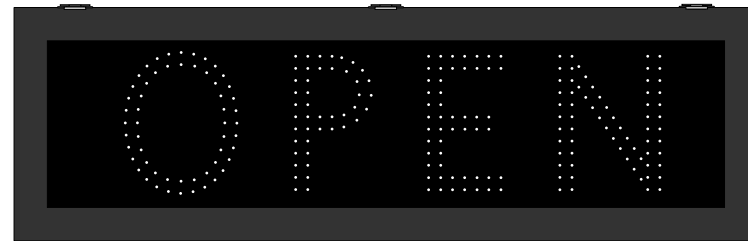

MESSAGE	LED/COLOR	HEIGHT	AMPS
OPEN	White Narrow Angle LED	12.0"	0.213-0.089
CLOSED	White Narrow Angle LED	12.0"	0.267-0.111

NOTE: Above messages are independently controlled.

Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300

Email: sales@signal-tech.com

Website: www.signal-tech.com

