

PRODUCT ID: 46296
DOT LED Blank-Out Sign

MODEL
 DOT2167RG-100DSH



DIMENSIONS
 21" H x 67" W x 5" D (est. 82.17 lbs)

CLASS
 Class: DOT Series
 Control Method: Switch (not included) or external relay.


CONSTRUCTION
 Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.
 Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)
 Faces: Single Faced Sign
 Finish: Powdercoat Black
 Integral Hood: Single piece 1/8" brake formed 6" deep aluminum hood
 Mounting Channel:

ELECTRICAL
 Input Voltage: 100-240 VAC
 Photodimming: (3) Redundant fail-safe photocells for auto photodimming
 Power Supplies: Redundant
 UL/cUL Listed: Listed for wet locations


MESSAGE
 Illumination: Super bright direct view LEDs. Message blanks out when off.
 Sign Messages: See message table below

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

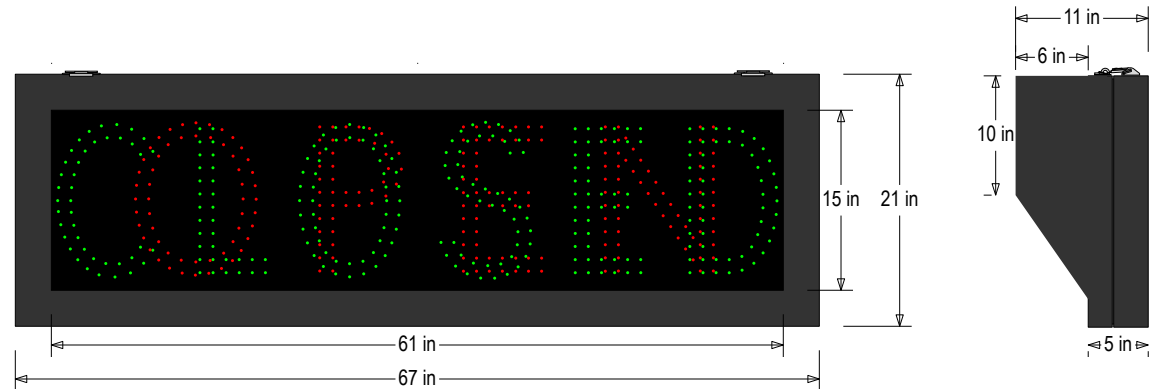

Sample Display Options

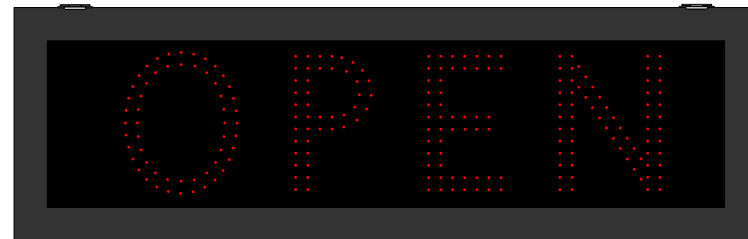

| MESSAGE | LED/COLOR | HEIGHT | AMPS |
|---------|------------------------|--------|-------------|
| OPEN | Red Narrow Angle LED | 12.0" | 0.130-0.054 |
| CLOSED | Green Narrow Angle LED | 12.0" | 0.267-0.111 |

NOTE: Above messages are independently controlled.

Signal-Tech
 4985 Pittsburgh Ave.
 Erie, PA 16509
 Phone: (877) 547-9900
 Fax: (814) 835-2300
 Email: sales@signal-tech.com
 Website: www.signal-tech.com



Proudly Made in the USA