

PRODUCT ID: 47637
Outdoor Blank-out LED Backlit Sign

MODEL
PHX3024WR-M224/120-277VAC



DIMENSIONS
30" H x 24" W x 2.5" D (est. 21.413 lbs)

CLASS
Class: PHX Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Back Construction: 0.125" Lift-n-Shift Back
Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.
Face Material: 1/8" thick, dark grey diffused acrylic
Faces: Single Faced Sign
Finish: Duranodic Bronze
Graphic: Printed graphic applied to surface
Mounting Channel: None

ELECTRICAL
Flashing: Not Included
Input Voltage: 120-277 VAC
UL/cUL Listed: Listed for wet locations

MESSAGE
Color: Black opaque
Font: Swiss 721 Bold Condensed BT
Illumination: Backlit with high intensity LEDs. Message blanks out when off
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Train Symbol Pedestrian DO NOT CROSS	White Wide Angle LED	14.875", 10.75", 3.5"	1.019-0.441
Train Symbol Pedestrian DO NOT CROSS	Red Wide Angle LED	14.875", 10.75", 3.5"	0.679-0.294


NOTE: Above messages are independently controlled.

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

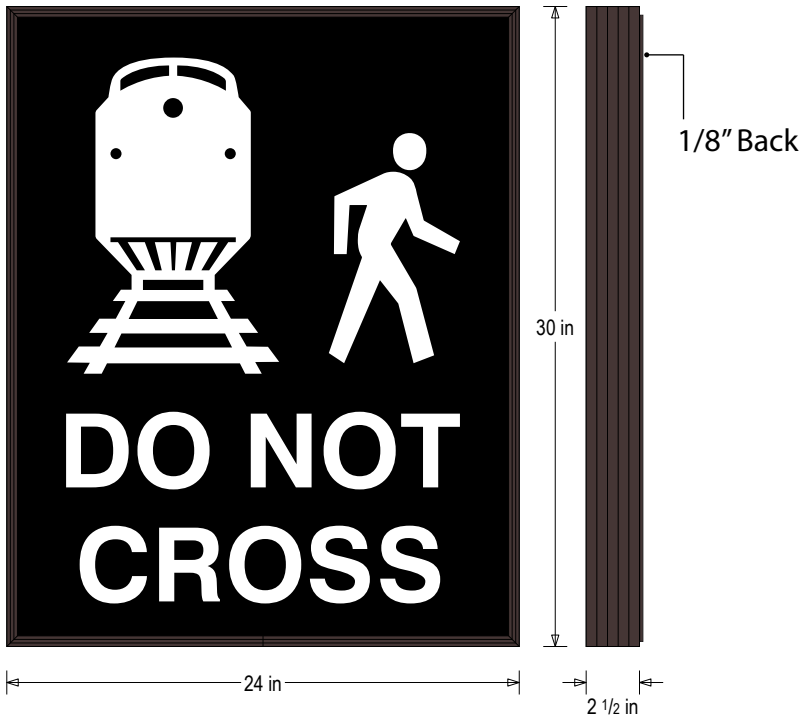

Sample Display Options



Frame Detail

