

PRODUCT ID: 48513
DOT LED Blank-Out Sign

MODEL
DOT3030ARW-K448/100-240VAC



DIMENSIONS
30" H x 30" W x 5" D (est. 53.355 lbs)

CLASS
Class: DOT Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.
Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)
Faces: Single Faced Sign
Finish: Powdercoat Black
Integral Hood: Optional hood available
Mounting Channel: None

ELECTRICAL
Input Voltage: 100-240 VAC
Photodimming: (3) Redundant fail-safe photocells for auto photodimming
Power Supplies: Redundant
UL/cUL Listed: Listed for wet locations

MESSAGE
Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

| MESSAGE | LED/COLOR | HEIGHT | AMPS |
|---------------------|-----------------------------|--------------|-------------|
| Bus Symbol | Amber Narrow Angle LED | 21.0" | 0.205-0.085 |
| No Left Turn Symbol | Red, White Narrow Angle LED | 21.0", 14.0" | 0.195-0.081 |


NOTE: Above messages are independently controlled.

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

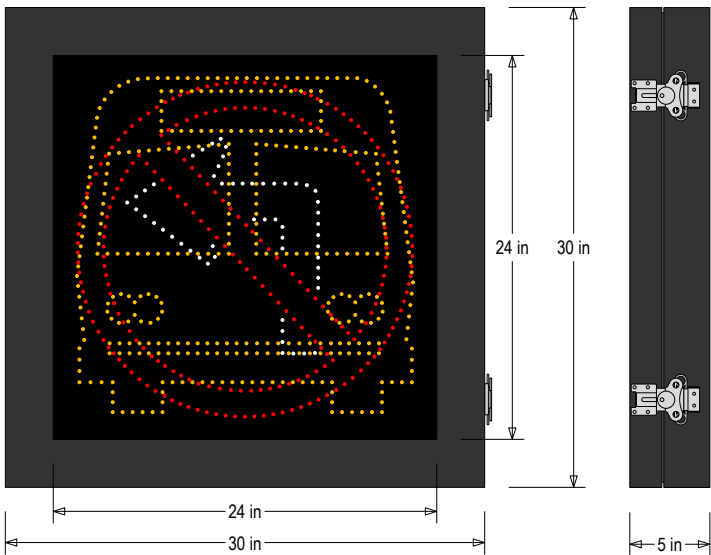

Sample Display Options

