

PRODUCT ID: 48716  
DOT LED Blank-Out Sign

MODEL  
DOT3324AAAA-M458/100-240VAC

DIMENSIONS  
33" H x 24" W x 5" D (est. 51.197 lbs)



CLASS  
Class: DOT Series  
Control Method: Switch (not included) or external relay.

CONSTRUCTION  
Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.  
Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.  
Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)  
Faces: Single Faced Sign  
Finish: Powdercoat Black  
Integral Hood: Optional hood available  
Mounting Channel: None

ELECTRICAL  
Input Voltage: 100-240 VAC  
Photodimming: (3) Redundant fail-safe photocells for auto photodimming  
Power Supplies: Redundant  
UL/cUL Listed: Listed for wet locations

MESSAGE  
Illumination: Super bright direct view LEDs. Message blanks out when off.  
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Light Rail Symbol	Amber Narrow Angle LED	16.5"	0.262-0.109
LOOK	Amber Narrow Angle LED	3.375"	0.043-0.018
Left Arrow	Amber Narrow Angle LED	3.0"	0.014-0.006
Right Arrow	Amber Narrow Angle LED	3.0"	0.014-0.006


NOTE: Above messages are independently controlled.

Signal-Tech  
4985 Pittsburgh Ave.  
Erie, PA 16509  
Phone: (877) 547-9900  
Fax: (814) 835-2300  
Email: sales@signal-tech.com  
Website: www.signal-tech.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

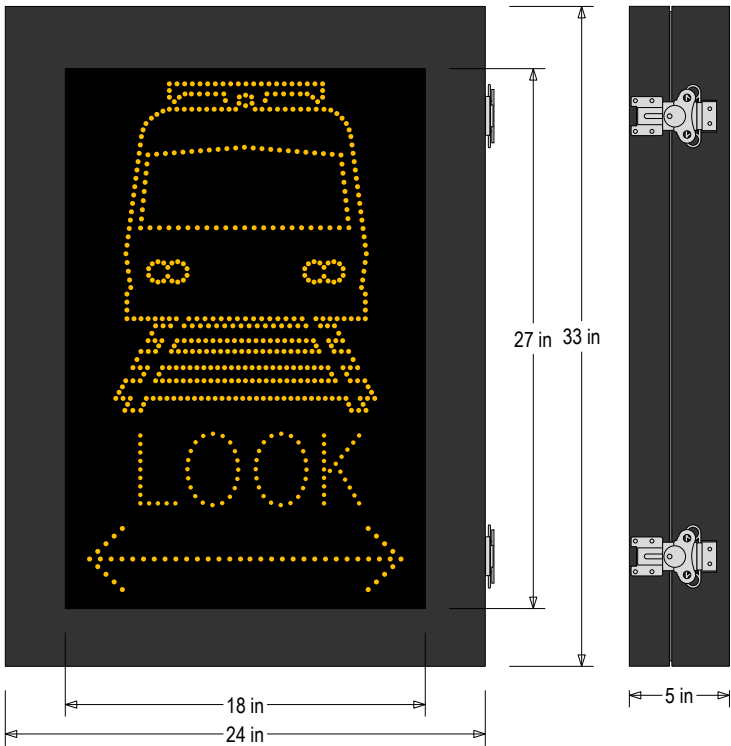

Sample Display Options

