

PRODUCT ID: 48716
DOT LED Blank-Out Sign

MODEL
 DOT3324AAAA-M458/100-240VAC



DIMENSIONS
 33" H x 24" W x 5" D (est. 51.197 lbs)

CLASS
 Class: DOT Series
 Control Method: Switch (not included) or external relay.

CONSTRUCTION
 Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.
 Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)
 Faces: Single Faced Sign
 Finish: Powdercoat Black
 Integral Hood: Optional hood available
 Mounting Channel: None

ELECTRICAL
 Input Voltage: 100-240 VAC
 Photodimming: (3) Redundant fail-safe photocells for auto photodimming
 Power Supplies: Redundant
 UL/cUL Listed: Listed for wet locations

MESSAGE
 Illumination: Super bright direct view LEDs. Message blanks out when off.
 Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Light Rail Symbol	Amber Narrow Angle LED	16.5"	0.262-0.109
LOOK	Amber Narrow Angle LED	3.375"	0.043-0.018
Left Arrow	Amber Narrow Angle LED	3.0"	0.014-0.006
Right Arrow	Amber Narrow Angle LED	3.0"	0.014-0.006


NOTE: Above messages are independently controlled.

Signal-Tech
 4985 Pittsburgh Ave.
 Erie, PA 16509
 Phone: (877) 547-9900
 Fax: (814) 835-2300
 Email: sales@signal-tech.com
 Website: www.signal-tech.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

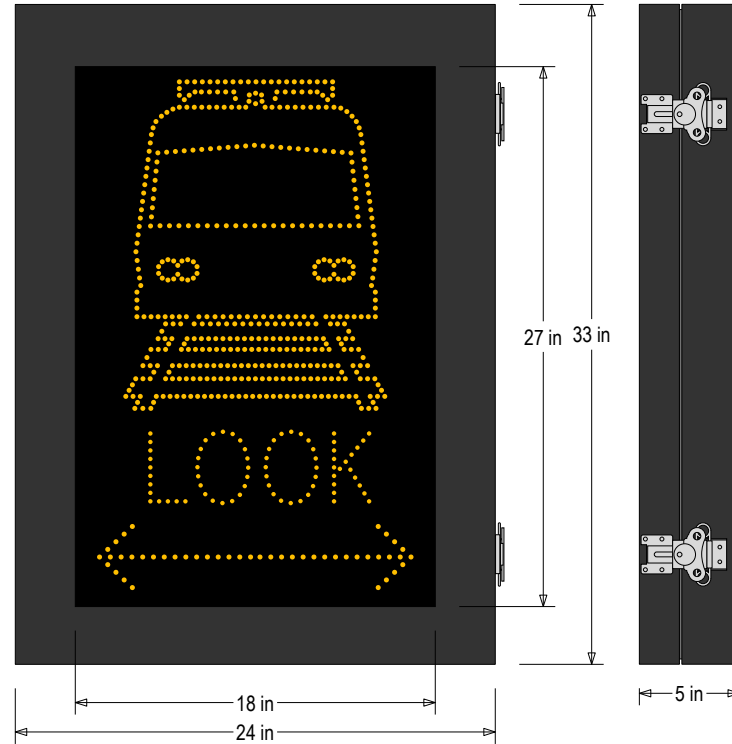

Sample Display Options

