

**PRODUCT ID: 48716**  
**DOT LED Blank-Out Sign**

**MODEL**  
 DOT3324AAAA-M458/100-240VAC



**DIMENSIONS**  
 33" H x 24" W x 5" D (est. 50.404 lbs)

**CLASS**  
 Class: DOT Series  
 Control Method: Switch (not included) or external relay.

**CONSTRUCTION**  
 Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.  
 Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.  
 Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)  
 Faces: Single Faced Sign  
 Finish: Powdercoat Black  
 Integral Hood: Optional hood available  
 Mounting Channel: None

**ELECTRICAL**  
 Input Voltage: 100-240 VAC  
 Photodimming: (3) Redundant fail-safe photocells for auto photodimming  
 Power Supplies: Redundant  
 UL/cUL Listed: Listed for wet locations

**MESSAGE**  
 Illumination: Super bright direct view LEDs. Message blanks out when off.  
 Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Light Rail Symbol	Amber Narrow Angle LED	16.5"	0.262-0.109
LOOK	Amber Narrow Angle LED	3.375"	0.043-0.018
Left Arrow	Amber Narrow Angle LED	3.0"	0.014-0.006
Right Arrow	Amber Narrow Angle LED	3.0"	0.014-0.006

NOTE: Above messages are independently controlled.


**Signal-Tech**  
 4985 Pittsburgh Ave.  
 Erie, PA 16509  
 Phone: (877) 547-9900  
 Fax: (814) 835-2300  
 Email: sales@signal-tech.com  
 Website: www.signal-tech.com



Proudly Made in the USA

**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

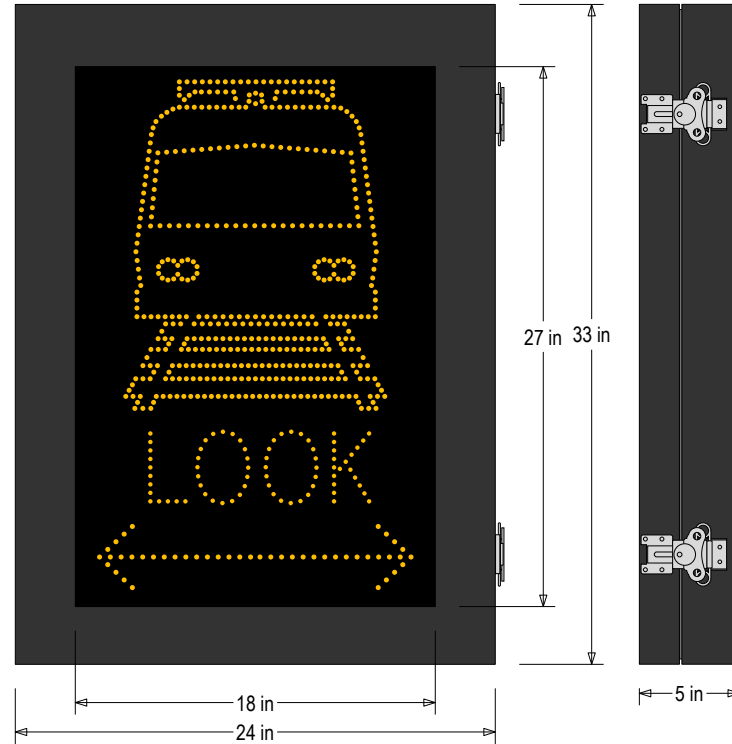

**Sample Display Options**

