

PRODUCT ID: 49216
DOT LED Blank-Out Sign

MODEL
DOT3636WWW-M527/100-240VAC



DIMENSIONS
36" H x 36" W x 5" D (est. 71.269 lbs)

CLASS
Class: DOT Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.
Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)
Faces: Single Faced Sign
Finish: Powdercoat Black
Integral Hood: Optional hood available
Mounting Channel: None

ELECTRICAL
Input Voltage: 100-240 VAC
Photodimming: (3) Redundant fail-safe photocells for auto photodimming
Power Supplies: Redundant
UL/cUL Listed: Listed for wet locations

MESSAGE
Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Up Arrow w/ ONLY	White Narrow Angle LED	18.5", 4.0"	0.138-0.057
Up Arrow w/ Right Veering Arrow	White Narrow Angle LED	18.5"	0.104-0.043
Right Veering Arrow w/ ONLY	White Narrow Angle LED	12.375", 4.0"	0.130-0.054


NOTE: Above messages are independently controlled.

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

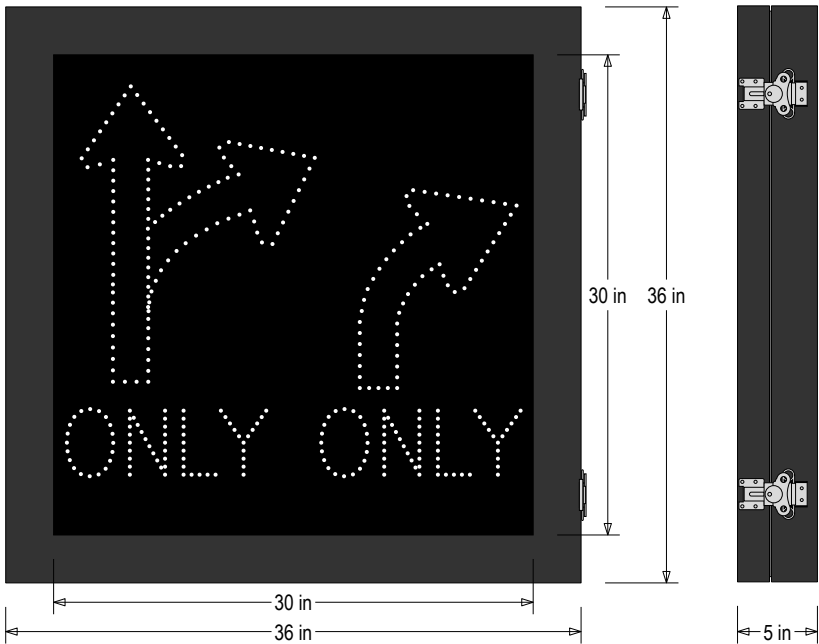

Sample Display Options

