

PRODUCT ID: 53205
DOT LED Blank-Out Sign

MODEL
 DOT3630RWAW-L017/100-240VAC



DIMENSIONS
 36" H x 30" W x 5" D (est. 55.592 lbs)

CLASS
 Class: DOT Series
 Control Method: Switch (not included) or external relay.

CONSTRUCTION
 Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.
 Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)
 Faces: Single Faced Sign
 Finish: Powdercoat Black
 Integral Hood: Optional hood available
 Mounting Channel: None

ELECTRICAL
 Input Voltage: 100-240 VAC
 Photodimming: (3) Redundant fail-safe photocells for auto photodimming
 Power Supplies: Redundant
 UL/cUL Listed: Listed for wet locations

MESSAGE
 Illumination: Super bright direct view LEDs. Message blanks out when off.
 Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
R9-3 No Pedestrian Crossing Symbol	Red/White Narrow Angle LED	22.125", 14.75"	0.277-0.115
W10-7 Light Rail Symbol	Amber Narrow Angle LED	21.25"	0.285-0.119
2ND TRAIN	White Narrow Angle LED	3.5"	0.122-0.051

NOTE: Above messages are independently controlled.


Signal-Tech
 4985 Pittsburgh Ave.
 Erie, PA 16509
 Phone: (877) 547-9900
 Fax: (814) 835-2300
 Email: sales@signal-tech.com
 Website: www.signal-tech.com



Proudly Made in the USA

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

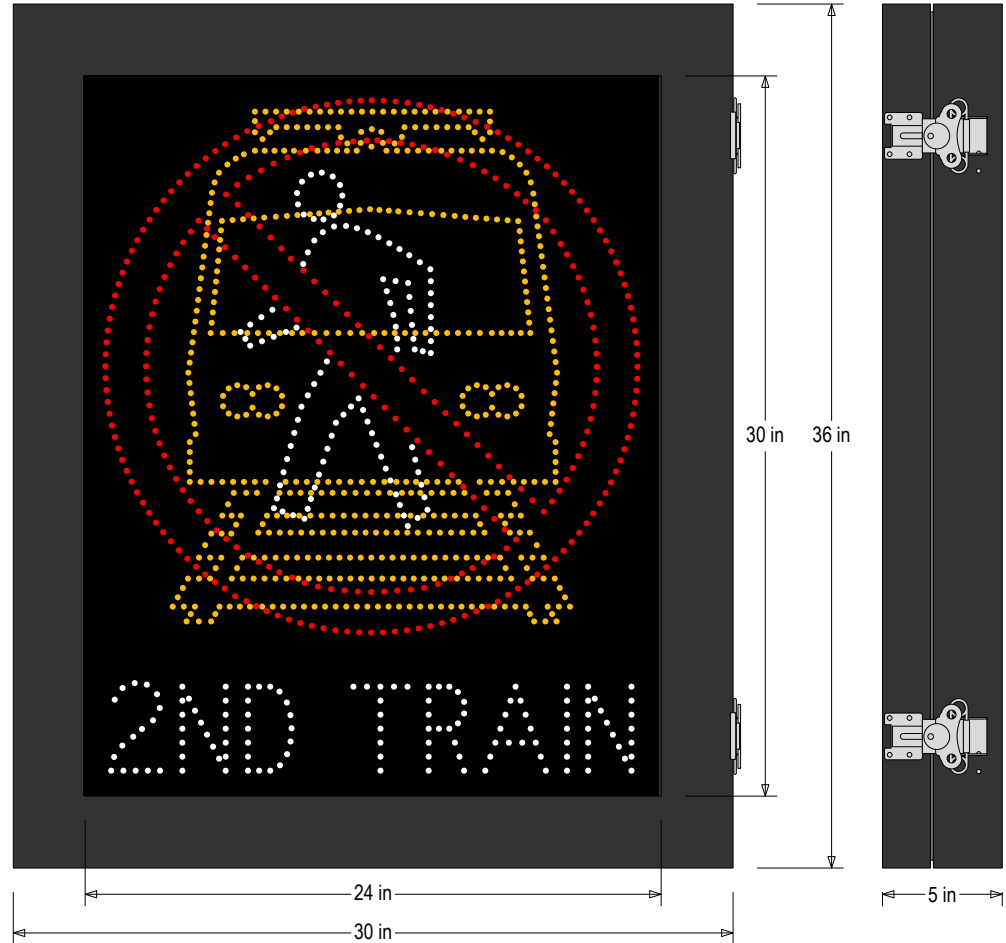

Sample Display Options

