

**PRODUCT ID: 53205**  
**DOT LED Blank-Out Sign**

**MODEL**  
 DOT3630RWAW-L017/100-240VAC



**DIMENSIONS**  
 36" H x 30" W x 5" D (est. 61.028 lbs)

**CLASS**  
 Class: DOT Series  
 Control Method: Switch (not included) or external relay.

**CONSTRUCTION**  
 Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.  
 Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)  
 Faces: Single Faced Sign  
 Finish: Powdercoat Black  
 Integral Hood: Optional hood available  
 Mounting Channel: None

**ELECTRICAL**  
 Input Voltage: 100-240 VAC  
 Photodimming: (3) Redundant fail-safe photocells for auto photodimming  
 Power Supplies: Redundant  
 UL/cUL Listed: Listed for wet locations

**MESSAGE**  
 Illumination: Super bright direct view LEDs. Message blanks out when off.  
 Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
R9-3 No Pedestrian Crossing Symbol	Red/White Narrow Angle LED	22.125", 14.75"	0.277-0.115
W10-7 Light Rail Symbol	Amber Narrow Angle LED	21.25"	0.285-0.119
2ND TRAIN	White Narrow Angle LED	3.5"	0.122-0.051


NOTE: Above messages are independently controlled.

**Signal-Tech**  
 4985 Pittsburgh Ave.  
 Erie, PA 16509  
 Phone: (877) 547-9900  
 Fax: (814) 835-2300  
 Email: sales@signal-tech.com  
 Website: www.signal-tech.com



**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

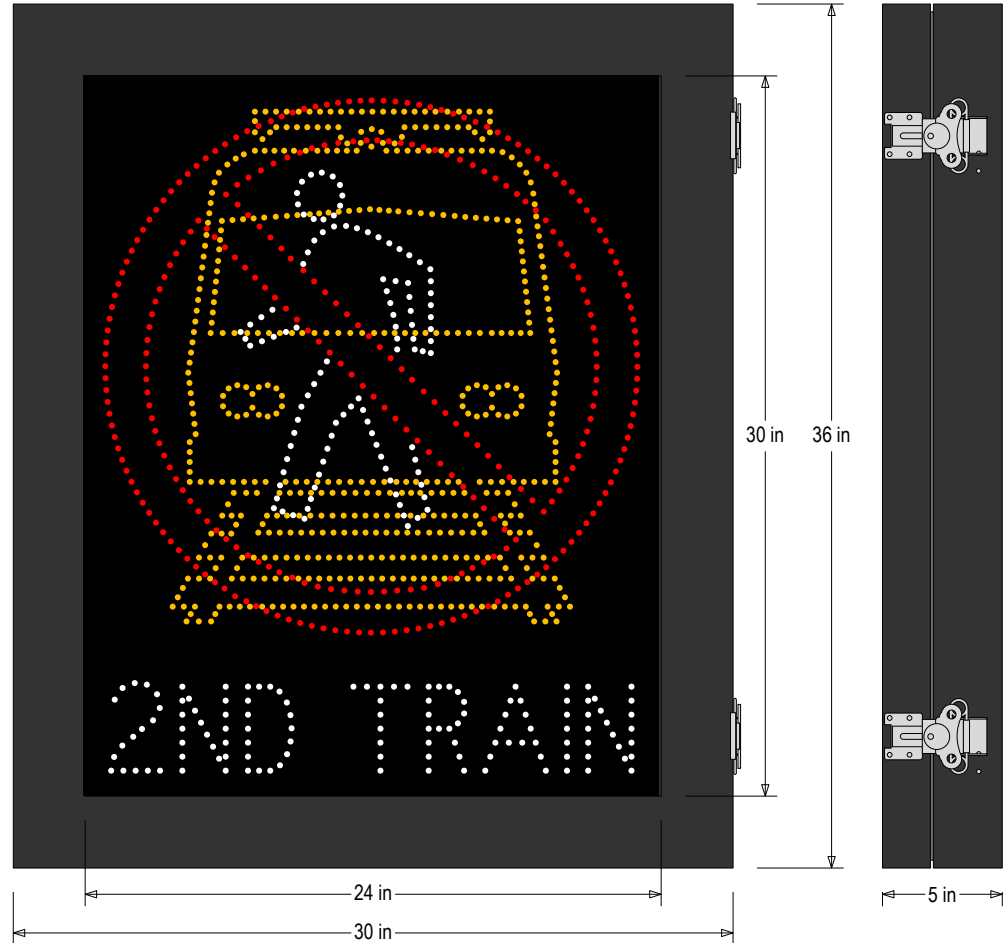

**Sample Display Options**

