

DOT LED Blank-Out Sign

DOT3630WW-N099/100-240VAC



36" H x 30" W x 5.13" D (est. 60.204 lbs)

Class: DOT Series

Control Method: Switch (not included) or external relay.

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.
Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

Integral Hood: Optional hood available

Mounting Channel: None

Input Voltage: 100-240 VAC

Photodimming: (3) Redundant fail-safe photocells for auto photodimming

Power Supplies: Redundant

UL/cUL Listed: Listed for wet locations

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below


MESSAGE	LED/COLOR	HEIGHT	AMPS
Up Arrow w/ Veering Right Arrow	White Narrow Angle LED	23.625"	0.152-0.063
Up Arrow w/ Veering Left/Right Arrow	White Narrow Angle LED	23.625"	0.195-0.081

NOTE: Above messages are independently controlled.

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com

Signal-Tech

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

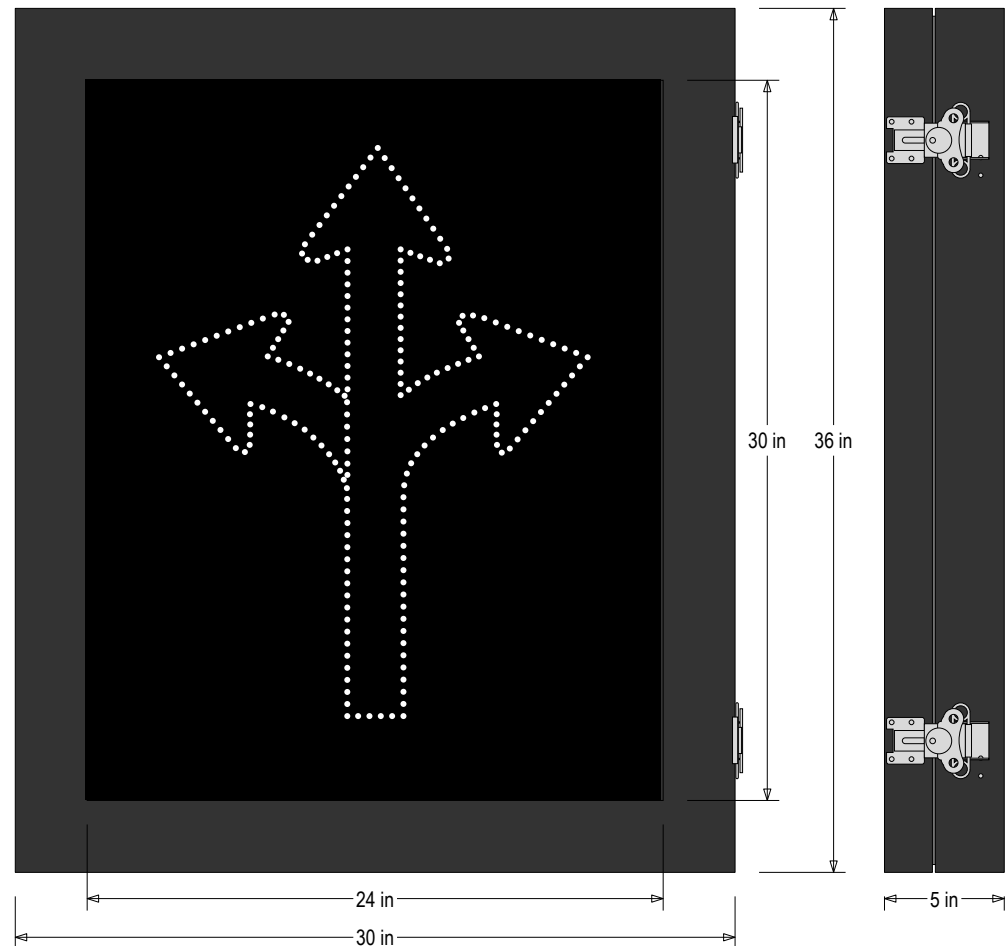

Sample Display Options

