

PRODUCT ID: 55097

Traffic-Grade LED Blank-Out Sign

MODEL

STR2424RG-175/120-277VAC



DIMENSIONS

24" H x 24" W x 6" D (est. 29.354 lbs)

CLASS

Class: STO Class

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.125" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, triple hollow, extruded aluminum frame, 6" deep.

Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)

Faces: Single Faced Sign

Finish: Flat Black

Mounting Channel: None

ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

Photodimming: Installed

Power Supplies: No Redundancy

UL/cUL Listed: Listed for wet locations

MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	21.0"	0.156-0.068
Down Arrow	Green Narrow Angle LED	21.0"	0.185-0.080

NOTE: Above messages are independently controlled.

Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300


Email: sales@signal-tech.com

Website: www.signal-tech.com





Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

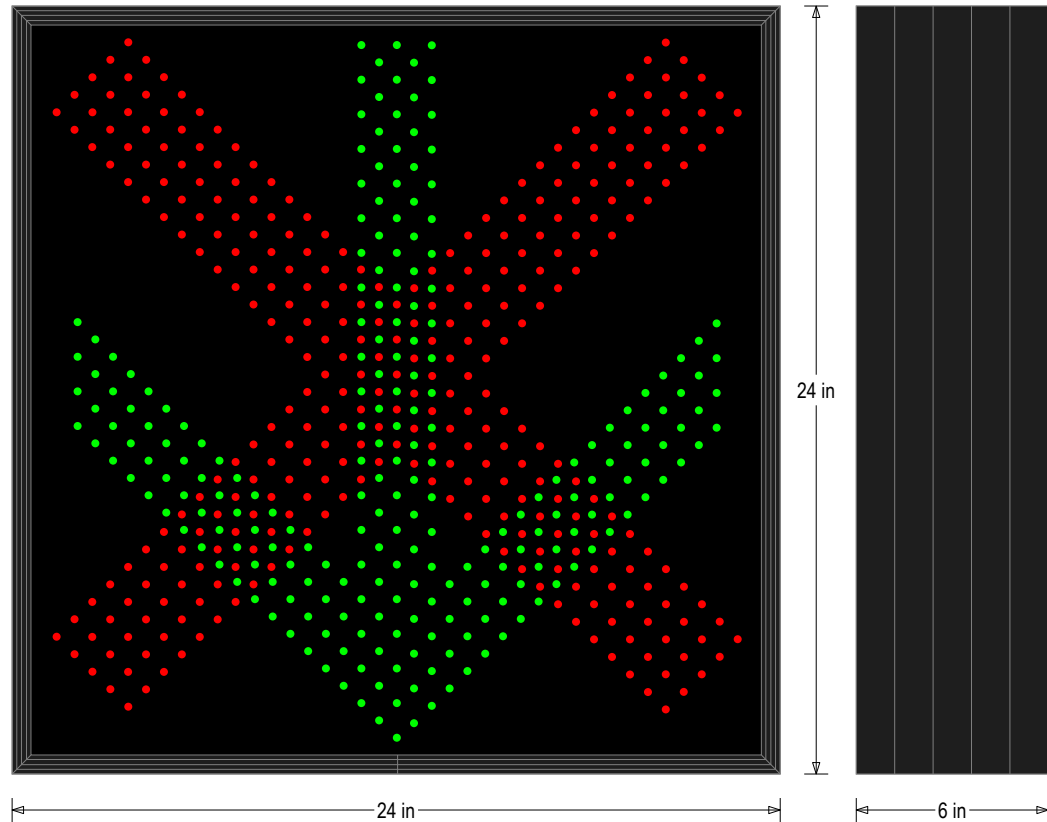

Sample Display Options

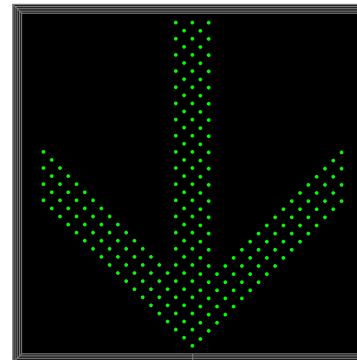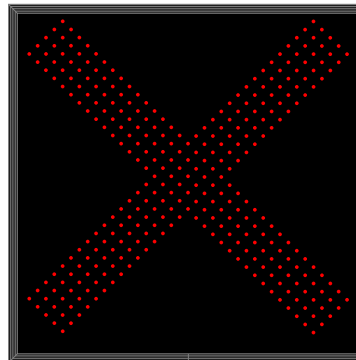

Frame Detail

