

# PRODUCT ID: 5651

## DOT LED Blank-Out Sign

### MODEL

DOT2424RG-175/100-240VAC



### DIMENSIONS

24" H x 24" W x 5" D (est. 43.906 lbs)

### CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

### CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66.

Hinged door with 1" silicone gasket, tool-less stainless-steel latches. 5.0" Deep.

Face Material: Replaceable 1/4" thick smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

Integral Hood: Optional hood available

Mounting Channel: None

### ELECTRICAL

Input Voltage: 100-240 VAC

Photodimming: (3) Redundant fail-safe photocells for auto photodimming

Power Supplies: Redundant

UL/cUL Listed: Listed for wet locations

### MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	16.75"	0.187-0.078
Down Arrow	Green Narrow Angle LED	17.5"	0.222-0.093

NOTE: Above messages are independently controlled.

### Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300


Email: sales@signal-tech.com

Website: www.signal-tech.com



## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

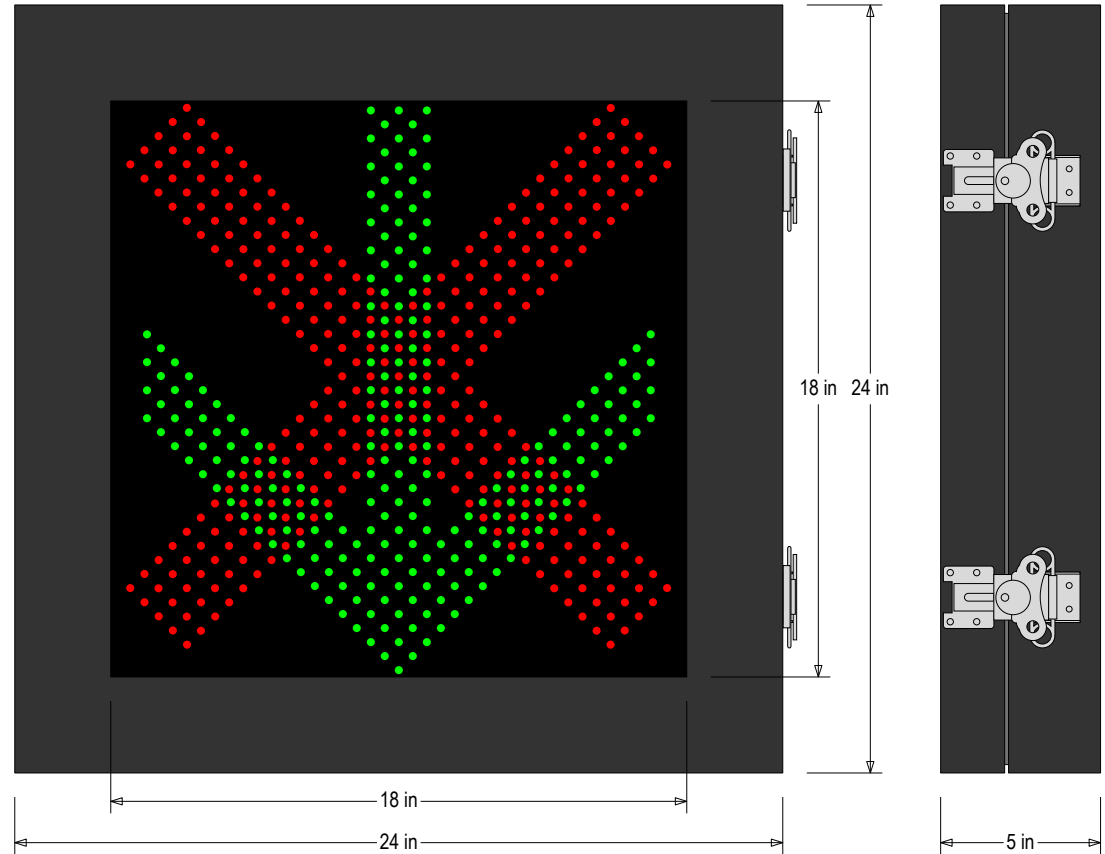

### Sample Display Options

