PRODUCT ID: 57944

Internally Illuminated LED Traffic Sign

MODEL
STRI3030W-O771KA/120-277VAC

DIMENSIONS
30" H x 30" W x 6" D (est. 28.077 lbs)

CLASS
Class: STRi Class
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Back Construction: 0.125" Lift-n-Shift Back
Cabinet: 1-piece, corrosion resistant, triple hollow, extruded aluminum frame, 6" deep.
Face Material: 1/8" thick, impact modified acrylic (0000)
Faces: Single Faced Sign
Finish: Black
Graphic: Printed graphic applied to surface
Mounting Channel: None

ELECTRICAL
Flashing: Not Included
Input Voltage: 120-277 VAC
UL/cUL Listed: Listed for wet locations

MESSAGE
Color: Refer to message table (Black Opaque, Amber and Red Translucent)
Font: Other:
Illumination: Backlit with high intensity LEDs
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Left Turning Arrow TURNING VEHICLES YIELD TO Pedestrian Symbol	Black Opaque, Amber and Red Translucent, White Wide Angle LED	5.375", 2.875", 8.625", 11.5"	1.257-0.545

NOTE: Above messages are independently controlled.

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

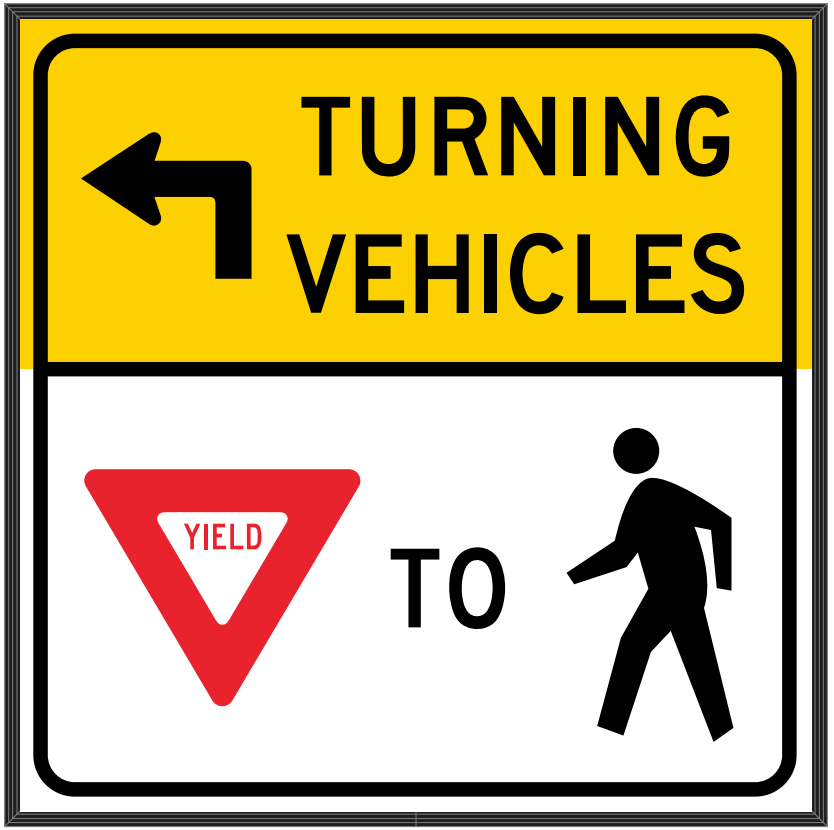

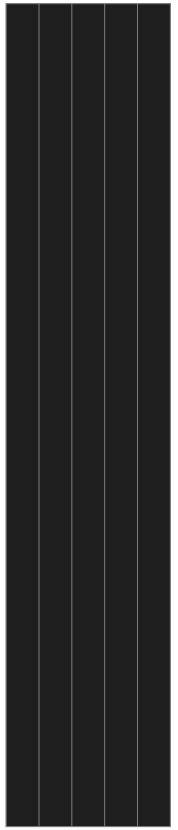

Frame Detail



Copyright (C) 2026 Signal-Tech