

PRODUCT ID: 58324
Outdoor LED Backlit Sign

MODEL
PHXF1218W-O878R/120-277VAC



DIMENSIONS
12" H x 18" W x 2.5" D (est. 7.559 lbs)

CLASS
CLASS: PHXF Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Back Construction: 0.050" Lift-n-Shift Back
Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.
Face Material: 1/8" thick, impact modified acrylic (0000)
Faces: Single Faced Sign
Finish: Duranodic Bronze
Graphic: Printed graphic applied to surface
Mounting Channel: None

ELECTRICAL
Flashing: Not Included
Input Voltage: 120-277 VAC
UL/cUL Listed: Listed for wet locations

MESSAGE
Color: Red translucent
Font: Swiss 721 Bold Condensed BT
Illumination: White high intensity LED backlit. Message always visible.
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
EV CHARGING ONLY w/ Tow symbol and EV Symbol	Red Translucent, White Wide Angle LED	1.5", 2.75", 9.25"	0.304-0.132


NOTE: Above messages are independently controlled.

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

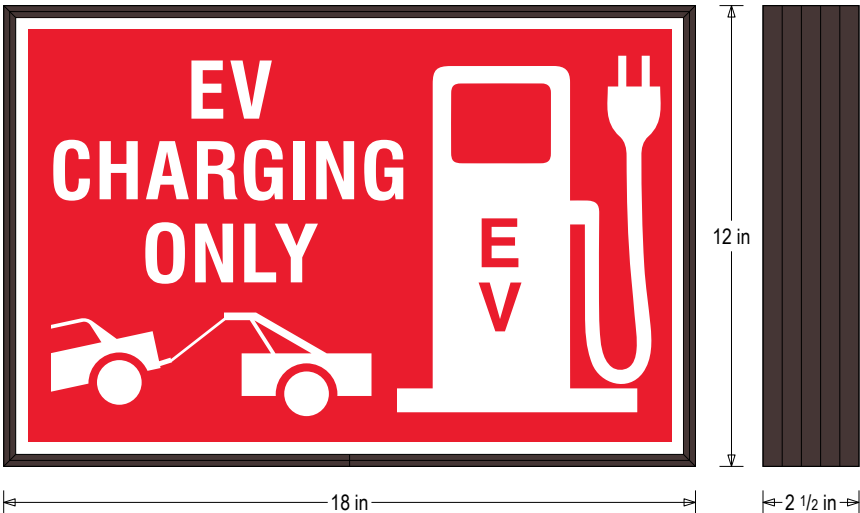

Frame Detail

