

**PRODUCT ID: 59723**  
Indoor LED Backlit Sign

**MODEL**  
SBLF118W-P226BYK/120-277VAC



**DIMENSIONS**  
11" H x 8" W x 2.5" D (est. 3.54 lbs)

**CLASS**  
Class: SBLF Series  
Control Method: Switch (not included) or external relay.


**CONSTRUCTION**  
Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.  
Face Material: 1/8" thick, impact modified acrylic (0000)  
Faces: Single Faced Sign  
Finish: Duranodic Bronze  
Graphic: Printed graphic applied to surface

**ELECTRICAL**  
Flashing: Not Included  
Input Voltage: 120-277 VAC  
UL/cUL Listed: Listed


**MESSAGE**  
Color: Refer to message table (Blue Translucent, Yellow Translucent, Black Opaque)  
Font: Other: (Swiss 721 Bold BT, Swiss 721 Condensed Bold BT)  
Illumination: Backlit with white LEDs. Message always visible.  
Sign Messages: See message table below

**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

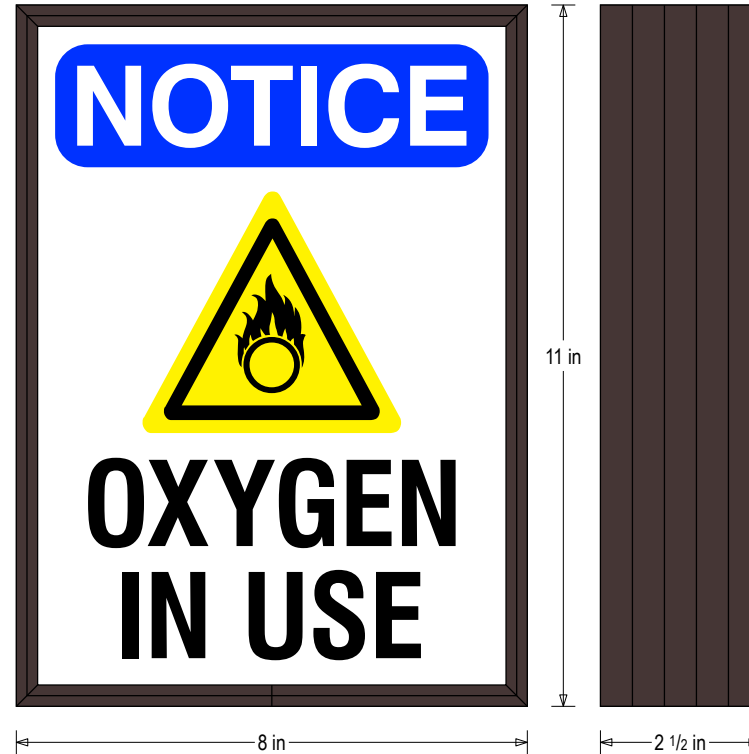

Frame Detail



MESSAGE	LED/COLOR	HEIGHT	AMPS
NOTICE OXYGEN IN USE w/ Oxygen hazard symbol	Blue Translucent, Yellow Translucent, Black Opaque	1.75", 1.375", 3.0"	0.058-0.025

NOTE: Above messages are independently controlled.

**Signal-Tech**  
4985 Pittsburgh Ave.  
Erie, PA 16509  
Phone: (877) 547-9900  
Fax: (814) 835-2300  
Email: sales@signal-tech.com  
Website: www.signal-tech.com

