

PRODUCT ID: 59723
Indoor LED Backlit Sign

MODEL

SBLF118W-P226BYK/120-277VAC



DIMENSIONS

11" H x 8" W x 2.5" D (est. 3.54 lbs)

CLASS

Class: SBLF Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep.

Face Material: 1/8" thick, impact modified acrylic (0000)

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed

MESSAGE

Color: Refer to message table (Blue Translucent, Yellow Translucent, Black Opaque)

Font: Other: (Swiss 721 Bold BT, Swiss 721 Condensed Bold BT)

Illumination: Backlit with white LEDs. Message always visible.

Sign Messages: See message table below

MESSAGE

LED/COLOR

HEIGHT

AMPS

NOTICE OXYGEN IN USE w/ Oxygen hazard symbol	Blue Translucent, Yellow Translucent, Black Opaque	1.75", 1.375", 3.0"	0.058-0.025
--	--	---------------------	-------------

NOTE: Above messages are independently controlled.

Signal-Tech

4985 Pittsburgh Ave.

Erie, PA 16509

Phone: (877) 547-9900

Fax: (814) 835-2300


Email: sales@signal-tech.com

Website: www.signal-tech.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

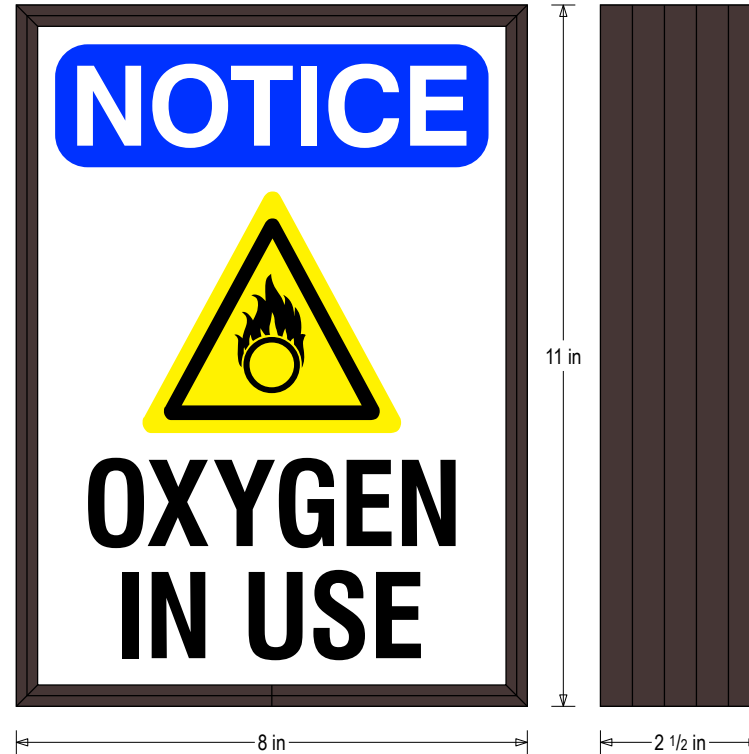

Frame Detail

