

PRODUCT ID: 67490
DOT LED Blank-Out Sign

MODEL
DOT3529WWR-J907/100-240VAC



DIMENSIONS
35" H x 29" W x 6.5" D (est. 67.041 lbs)

CLASS
Class: DOT Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.
Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)
Faces: Single Faced Sign
Finish: Powdercoat Black

ELECTRICAL
Input Voltage: 100-240 VAC
Photodimming: IR photocells for auto photodimming
Power Supplies: No Redundancy
UL/cUL Listed: Listed for wet locations

MESSAGE
Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

| MESSAGE | LED/COLOR | HEIGHT | AMPS |
|--|-----------------------------|--------------------|-------------|
| NO TURN ON RED | White Narrow Angle LED | 6.0", 5.0" | 0.219-0.091 |
| RIGHT TURN Yield Symbol TO Pedestrian Symbol | White, Red Narrow Angle LED | 3.5", 9.75", 12.0" | 0.507-0.211 |


NOTE: Above messages are independently controlled.

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

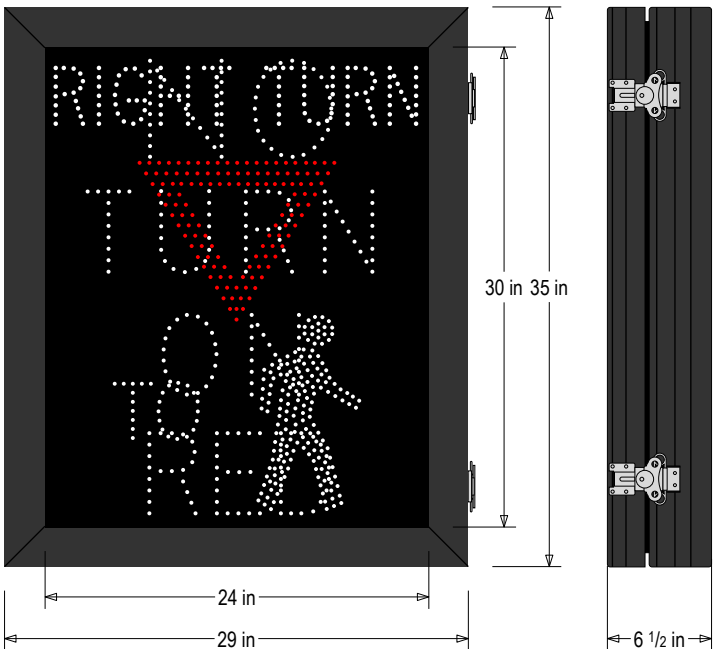

Sample Display Options

