

PRODUCT ID: 67777
DOT LED Blank-Out Sign

MODEL
DOT4141RWAWR-S599/100-240VAC



DIMENSIONS
41" H x 41" W x 6.5" D (est. 100.654 lbs)

CLASS
Class: DOT Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.
Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)
Faces: Single Faced Sign
Finish: Powdercoat Black

ELECTRICAL
Input Voltage: 100-240 VAC
Photodimming: IR photocells for auto photodimming
Power Supplies: No Redundancy
UL/cUL Listed: Listed for wet locations

MESSAGE
Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
No Right Turn Symbol	Red, White Narrow Angle LED	31.0", 19.0"	0.294-0.123
TURNING VEHICLES Right Turn Arrow YIELD TO Pedestrian Symbol	Amber, White, Red Narrow Angle LED	30.75", 17.125", 4.25", 17.1"	0.498-0.207


NOTE: Above messages are independently controlled.

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com




Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

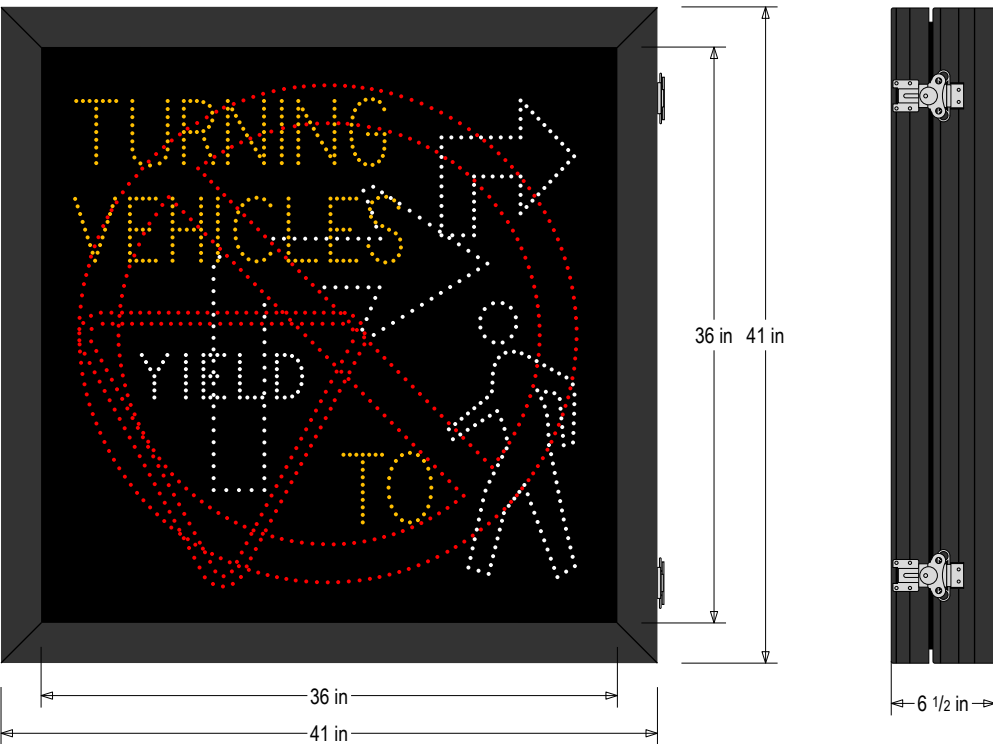

Sample Display Options

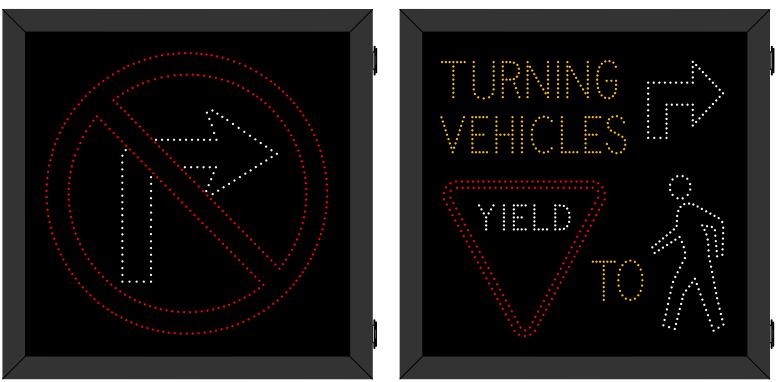

Frame Detail

