

**PRODUCT ID: 67887**  
**DOT LED Blank-Out Sign**

**MODEL**  
DOT2424RAG-B295DS/100-240VAC



**DIMENSIONS**  
24" H x 24" W x 6.5" D (est. 48.04 lbs)

**CLASS**  
**Class:** DOT Series  
**Control Method:** Switch (not included) or external relay.

**CONSTRUCTION**  
**Cabinet:** Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.  
**Face Material:** 1/8" impact resistant, smoke-tinted acrylic (5109)  
**Faces:** Single Faced Sign  
**Finish:** Powdercoat Black

**ELECTRICAL**  
**Input Voltage:** 100-240 VAC  
**Photodimming:** IR photocells for auto photodimming  
**Power Supplies:** No Redundancy  
**UL/cUL Listed:** Listed for wet locations

**MESSAGE**  
**Illumination:** Super bright direct view LEDs. Message blanks out when off.  
**Sign Messages:** See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	15.0"	0.058-0.024
X	Amber Narrow Angle LED	15.0"	0.058-0.024
Down Arrow	Green Narrow Angle LED	16.25"	0.090-0.037


NOTE: Above messages are independently controlled.

**Signal-Tech**  
4985 Pittsburgh Ave.  
Erie, PA 16509  
Phone: (877) 547-9900  
Fax: (814) 835-2300  
Email: sales@signal-tech.com  
Website: www.signal-tech.com




**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

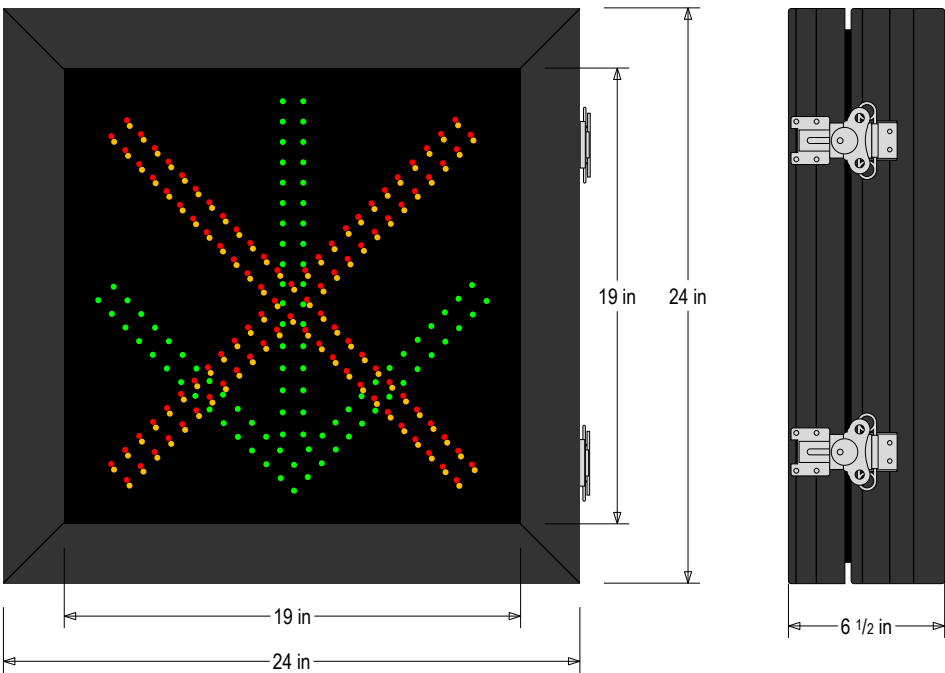

**Sample Display Options**

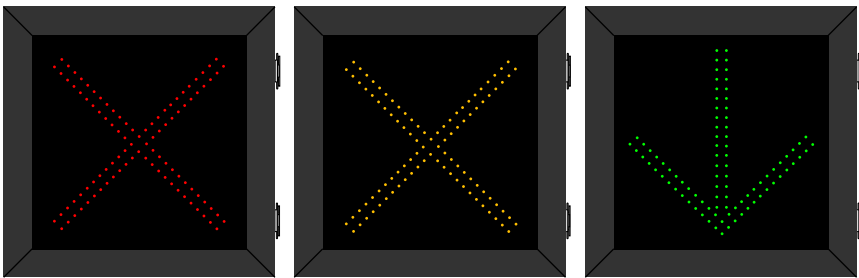

**Frame Detail**

