

PRODUCT ID: 67887
DOT LED Blank-Out Sign

MODEL
 DOT2424RAG-B295DS/100-240VAC



DIMENSIONS
 24" H x 24" W x 6.5" D (est. 48.04 lbs)

CLASS
 Class: DOT Series
 Control Method: Switch (not included) or external relay.

CONSTRUCTION
 Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.
 Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)
 Faces: Single Faced Sign
 Finish: Powdercoat Black

ELECTRICAL
 Input Voltage: 100-240 VAC
 Photodimming: IR photocells for auto photodimming
 Power Supplies: No Redundancy
 UL/cUL Listed: Listed for wet locations

MESSAGE
 Illumination: Super bright direct view LEDs. Message blanks out when off.
 Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	15.0"	0.058-0.024
X	Amber Narrow Angle LED	15.0"	0.058-0.024
Down Arrow	Green Narrow Angle LED	16.25"	0.090-0.037


NOTE: Above messages are independently controlled.

Signal-Tech
 4985 Pittsburgh Ave.
 Erie, PA 16509
 Phone: (877) 547-9900
 Fax: (814) 835-2300
 Email: sales@signal-tech.com
 Website: www.signal-tech.com




Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

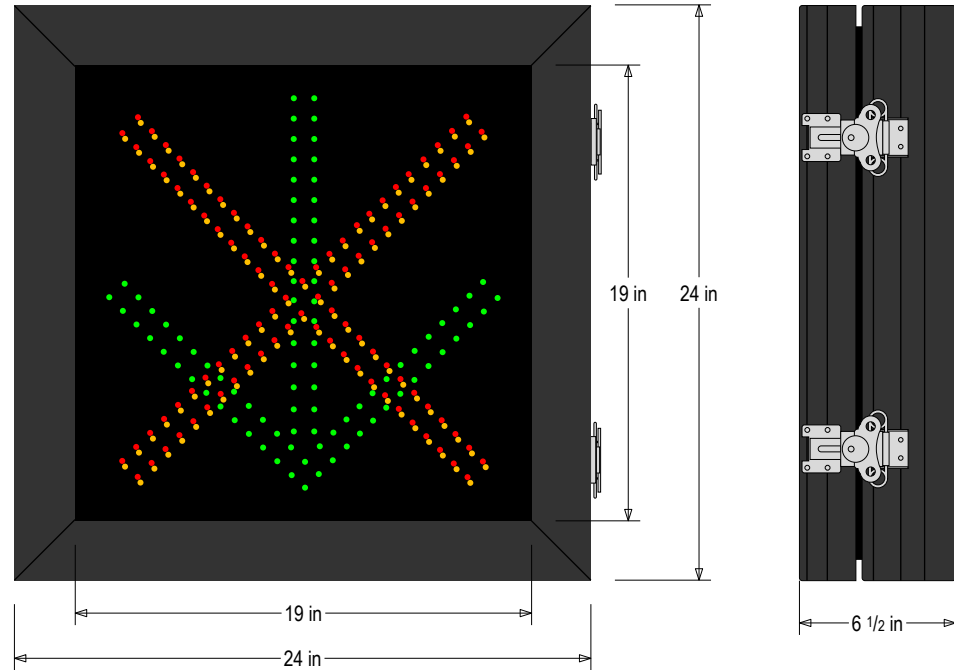

Sample Display Options

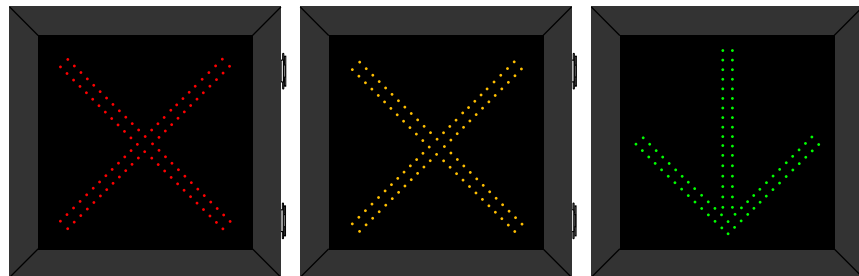

Frame Detail

