

**PRODUCT ID: 67889**  
**DOT LED Blank-Out Sign**

**MODEL**  
DOT3838WGRA-S607/100-240VAC



**DIMENSIONS**  
38" H x 38" W x 6.5" D (est. 87.913 lbs)

**CLASS**  
Class: DOT Series  
Control Method: Switch (not included) or external relay.

**CONSTRUCTION**  
Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.  
Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)  
Faces: Single Faced Sign  
Finish: Powdercoat Black

**ELECTRICAL**  
Input Voltage: 100-240 VAC  
Photodimming: IR photocells for auto photodimming  
Power Supplies: No Redundancy  
UL/cUL Listed: Listed for wet locations

**MESSAGE**  
Illumination: Super bright direct view LEDs. Message blanks out when off.  
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Center Lane Veering Arrows	White Narrow Angle LED	28.0"	0.173-0.072
Down Arrow	Green Narrow Angle LED	27.0"	0.133-0.055
X	Red Narrow Angle LED	26.75"	0.104-0.043
X	Amber Narrow Angle LED	26.75"	0.104-0.043


NOTE: Above messages are independently controlled.

**Signal-Tech**  
4985 Pittsburgh Ave.  
Erie, PA 16509  
Phone: (877) 547-9900  
Fax: (814) 835-2300  
Email: sales@signal-tech.com  
Website: www.signal-tech.com




**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

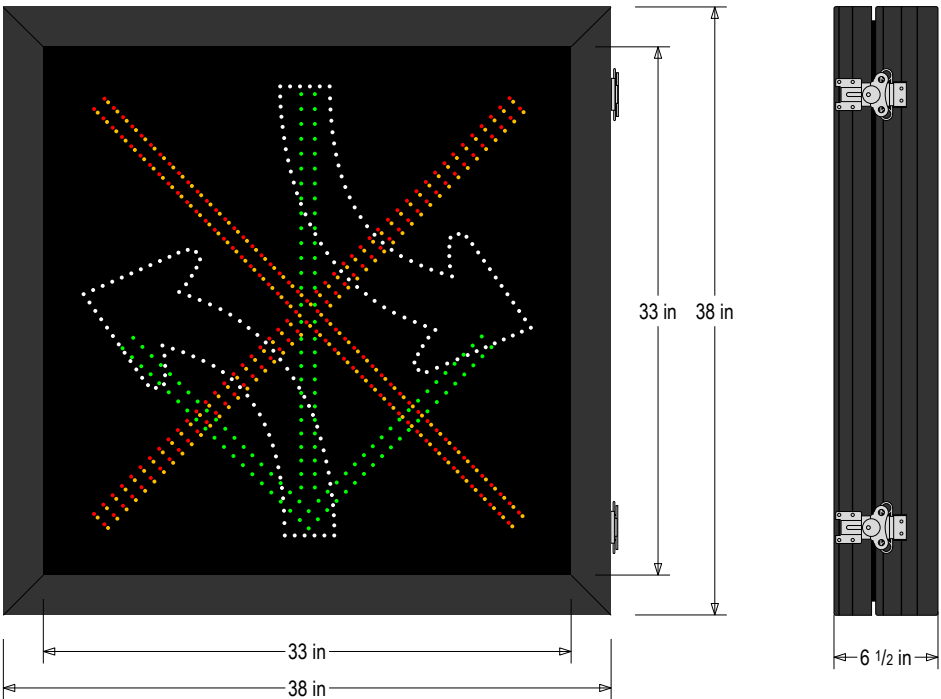

**Sample Display Options**

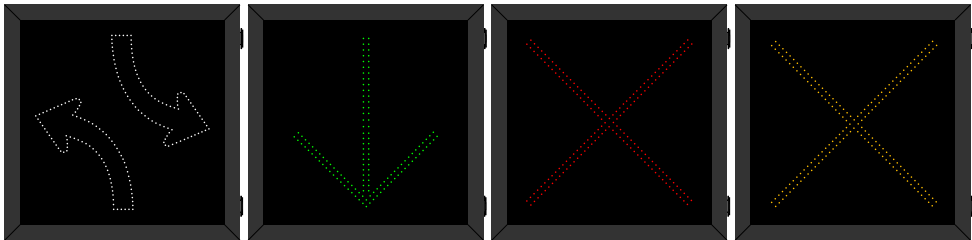

**Frame Detail**

