

PRODUCT ID: 67892
DOT LED Blank-Out Sign

MODEL
DOT3838RAW-N408/100-240VAC



DIMENSIONS
38" H x 38" W x 6.5" D (est. 86.506 lbs)

CLASS
Class: DOT Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.
Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)
Faces: Single Faced Sign
Finish: Powdercoat Black

ELECTRICAL
Input Voltage: 100-240 VAC
Photodimming: IR photocells for auto photodimming
Power Supplies: No Redundancy
UL/cUL Listed: Listed for wet locations

MESSAGE
Illumination: Super bright direct view LEDs. Message blanks out when off.
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	27.0"	0.104-0.043
X	Amber Narrow Angle LED	27.0"	0.104-0.043
Veering Left Arrow w/ ONLY	White Narrow Angle LED	18.0", 5.75"	0.179-0.075


NOTE: Above messages are independently controlled.

Signal-Tech
4985 Pittsburgh Ave.
Erie, PA 16509
Phone: (877) 547-9900
Fax: (814) 835-2300
Email: sales@signal-tech.com
Website: www.signal-tech.com




Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

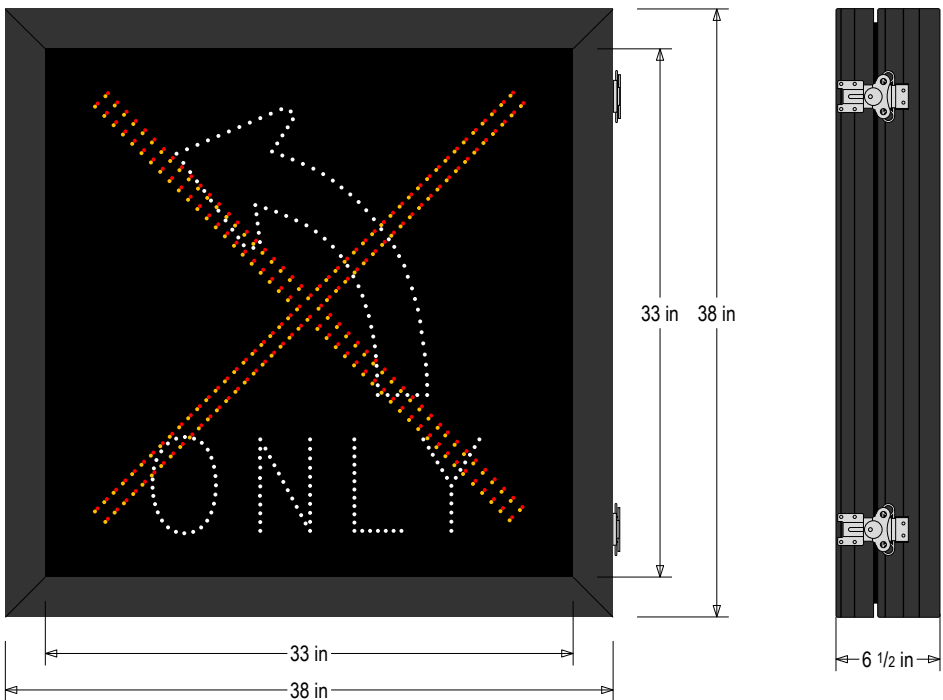

Sample Display Options

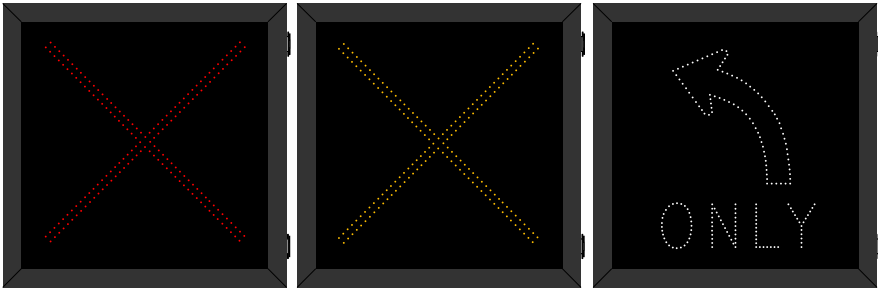

Frame Detail

