# PRODUCT ID: 68003

DOT LED Blank-Out Sign

### **MODEL**

DOT3030RW-D756/9-24VDC



#### **DIMENSIONS**

30" H x 30" W x 6.5" D (est. 59.57 lbs)

#### **CLASS**

Class: DOT Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep. Face Material: 1/8" impact resistant, smoke-tinted polycarbonate (5109)

Faces: Single Faced Sign Finish: Powdercoat Black

#### **ELECTRICAL**

Input Voltage: 9-24 VDC
Photodimming: IR photocells for auto photodimming
Power Supplies: Redundant
UL/cUL Listed: Listed for wet locations

#### **MESSAGE**

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	<b>AMPS</b>
! DANGER !	Red Wide Angle LED	3.25"	0.729-0.273
ANOTHER TRAIN COMING	White Wide Angle LED	3.5"	2.951-1.107

NOTE: Above messages are independently controlled.

#### Signal-Tech

4985 Pittsburgh Ave. Erie, PA 16509 Phone: (877) 547-9900


Fax: (814) 835-2300


Email: sales@signal-tech.com Website: www.signal-tech.com



## **Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

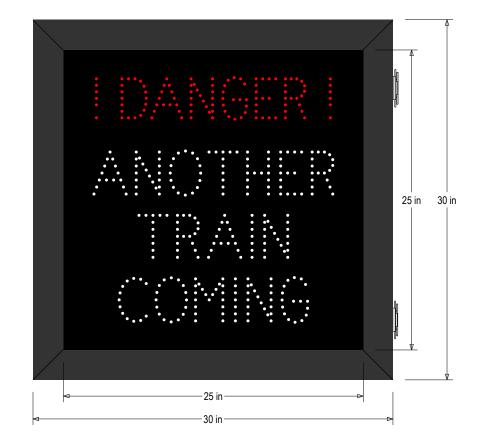



Frame Detail

