PRODUCT ID: 68170

DOT LED Blank-Out Sign

MODEL

DOT2323RG-175/9-24VDC



DIMENSIONS

23" H x 23" W x 6.5" D (est. 43.354 lbs)

CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5"

Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)
Faces: Single Faced Sign
Finish: Powdercoat Black

ELECTRICAL

Input Voltage: 9-24 VDC
Photodimming: IR photocells for auto photodimming
Power Supplies: Redundant
UL/cUL Listed: Listed for wet locations

MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.

Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	16.75"	2.080-0.780
Down Arrow	Green Narrow Angle LED	17.5"	2.471-0.927

NOTE: Above messages are independently controlled.

Signal-Tech

4985 Pittsburgh Ave. Erie, PA 16509 Phone: (877) 547-9900


Fax: (814) 835-2300

Email: sales@signal-tech.com Website: www.signal-tech.com




Product View


NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

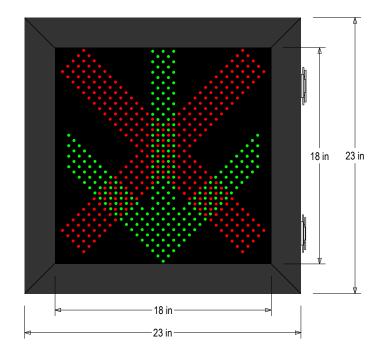



Sample Display Options







Copyright (C) 2025 Signal-Tech

12072023 | EMC