

**PRODUCT ID: 68245**  
**DOT LED Blank-Out Sign**

**MODEL**  
 DOT2929RW-B360DS/100-240VAC



**DIMENSIONS**  
 29" H x 29" W x 6.5" D (est. 58.393 lbs)

**CLASS**  
 Class: DOT Series  
 Control Method: Switch (not included) or external relay.


**CONSTRUCTION**  
 Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.  
 Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)  
 Faces: Single Faced Sign  
 Finish: Powdercoat Black

**ELECTRICAL**  
 Input Voltage: 100-240 VAC  
 Photodimming: IR photocells for auto photodimming  
 Power Supplies: No Redundancy  
 UL/cUL Listed: Listed for wet locations

**MESSAGE**  
 Illumination: Super bright direct view LEDs. Message blanks out when off.  
 Sign Messages: See message table below

**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

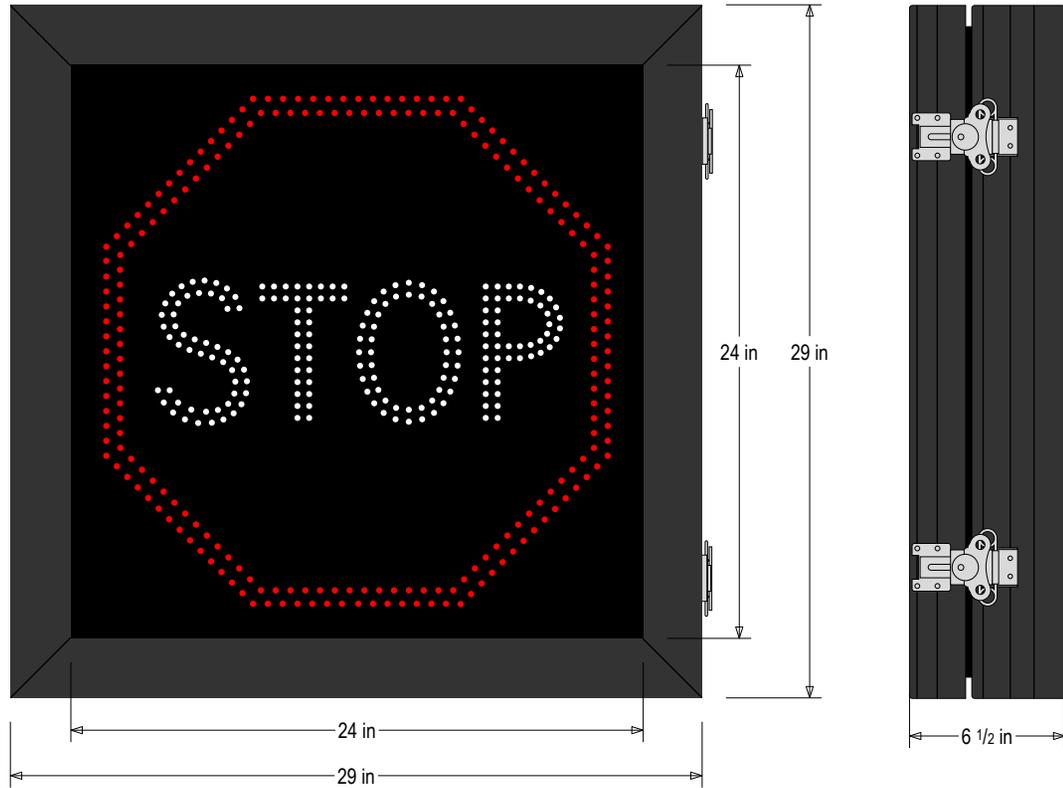

| MESSAGE         | LED/COLOR                   | HEIGHT        | AMPS        |
|-----------------|-----------------------------|---------------|-------------|
| STOP w/ Octagon | Red, White Narrow Angle LED | 21.125", 5.5" | 0.309-0.129 |

NOTE: Above messages are independently controlled.

**Signal-Tech**  
 4985 Pittsburgh Ave.  
 Erie, PA 16509  
 Phone: (877) 547-9900  
 Fax: (814) 835-2300  
 Email: sales@signal-tech.com  
 Website: www.signal-tech.com



Frame Detail

